

**CITY OF SEATTLE**

**ORDINANCE \_\_\_\_\_**

**COUNCIL BILL \_\_\_\_\_**

..title

AN ORDINANCE relating to land use and zoning; implementing interim controls to comply with various state laws; establishing findings and adopting a workplan for permanent legislation; amending Sections 23.22.062, 23.24.045, 23.34.011, 23.44.006, 23.44.010, 23.44.011, 23.44.012, 23.44.014, 23.44.016, 23.44.017, 23.44.044, 23.45.512, 23.45.514, 23.45.518, 23.45.522, 23.45.527, 23.45.529, 23.53.006, 23.53.025, 23.54.015, 23.54.020, 23.54.030, 23.84A.010, 23.84A.025, 23.84A.036, and 25.09.240 of the Seattle Municipal Code.

..body

WHEREAS, the Office of Planning and Community Development, in cooperation with other

City agencies including the Seattle Planning Commission, began in 2022 a series of programs and events, under the title One Seattle Plan, to engage the public in discussions about potential changes to the Comprehensive Plan, consistent with the One Seattle Plan Public Participation Plan and documented in the One Seattle Plan Public Engagement Report; and

WHEREAS, in April 2021, the Washington State Legislature passed Chapter 300, Laws of 2021

(also known as House Bill 1287), which directed the building code council to adopt rules for electric vehicle infrastructure requirements; and

WHEREAS, in April 2023, the Washington State Legislature passed Chapter 322, Laws of 2023

(also known as House Bill 1110), which amended the Growth Management Act to require certain cities, including Seattle, to allow the development of “middle housing” in all residential areas, including at least four units on each lot and at least six units per lot near transit or when at least two units are affordable; and

1 WHEREAS, in April 2023, the Washington State Legislature passed Chapter 333, Laws of 2023  
2 (also known as House Bill 1293), which imposes limits on design review and requires  
3 that design standards be clear and objective; and

4 WHEREAS, in March 2024, the Washington State Legislature passed Chapter 152, Laws of  
5 2024 (also known as House Bill 2321), which clarified standards implemented through  
6 House Bill 1110; and

7 WHEREAS, in March 2024, the Washington State Legislature passed Chapter 274, Laws of  
8 2024 (also known as Senate Bill 6015), which imposes restrictions on parking  
9 requirements; and

10 WHEREAS, in March 2024, the Office of Planning and Community Development published a  
11 Draft Environmental Impact Statement analyzing the potential effects of five different  
12 growth alternatives in the city through 2044 and a “no action” alternative, conducted two  
13 public hearings, and received comments from the public on this document; and

14 WHEREAS, in March 2024, the Office of Planning and Community Development published a  
15 Draft Comprehensive Plan rooted in a deliberate approach to creating more housing,  
16 encouraging density near amenities and frequent transit, and preventing displacement;  
17 and

18 WHEREAS, in Spring 2024, the Office of Planning and Community Development held open  
19 houses across all seven council districts and received input from residents and community  
20 groups over a two-month public comment period on the draft plan and an initial proposal  
21 for updating Neighborhood Residential zones; and

22 WHEREAS, in Fall 2024, the Office of Planning and Community Development held open  
23 houses across all seven council districts and received input from residents and community

1 groups over a two-month public comment period on a revised proposal for updating  
2 Neighborhood Residential zones and draft legislation; and

3 WHEREAS, in January 2025, the Office of Planning and Community Development published a  
4 Final Environmental Impact Statement that included analysis of a preferred growth  
5 strategy alternative that increased potential housing supply in the city by doubling  
6 residential development capacity and that promoted housing supply, variety, and  
7 affordability by adding new and expanded areas for growth in neighborhoods across the  
8 city;

9 WHEREAS, in February 2025, the Final Environmental Impact Statement was appealed to the  
10 Hearing Examiner; NOW, THEREFORE,

11 **BE IT ORDAINED BY THE CITY OF SEATTLE AS FOLLOWS:**

12 Section 1. The City Council makes the following legislative findings of fact and declares  
13 as follows:

14 A. Chapter 322, Laws of 2023, Chapter 333, Laws of 2023, and Chapter 152, Laws of  
15 2024, establish a deadline for local jurisdiction compliance of six months after its next periodic  
16 comprehensive plan update required under RCW 36.70A.130. The Washington State Department  
17 of Commerce has interpreted this deadline to be six months after the statutory deadline  
18 established in RCW 36.70A.130. Consistent with this guidance, a compliance deadline for The  
19 City of Seattle would be June 30, 2025. The requirements of Chapter 300, Laws of 2021, and  
20 Chapter 274, Laws of 2024, are currently in effect.

21 B. The Land Use Code does not fully comply with Chapter 300, Laws of 2021, Chapter  
22 322, Laws of 2023, Chapter 333, Laws of 2023, Chapter 152, Laws of 2024, and Chapter 274,  
23 Laws of 2024, necessitating amendment of the code to ensure consistency with State law.

1 C. In October 2024, the Washington State Department of Commerce released an updated  
2 model ordinance for local implementation of Chapter 322, Laws of 2023.

3 D. Chapter 322, Laws of 2023, stipulates that if a jurisdiction fails to enact development  
4 regulations that comply with its requirements by the deadline, that the model ordinance  
5 supersedes any non-compliant local development regulations for the purpose of issuance of  
6 permits for middle housing development.

7 E. The Final Environmental Impact Statement (FEIS) released by the Office of Planning  
8 and Community Development in January 2025 includes analysis of a preferred alternative that  
9 implements Chapter 300, Laws of 2021, Chapter 322, Laws of 2023, Chapter 333, Laws of 2023,  
10 Chapter 152, Laws of 2024, and Chapter 274, Laws of 2024 through amendments to the City's  
11 Comprehensive Plan and zoning regulations.

12 F. Following a 14-day appeal period, six separate appeals of the adequacy of the FEIS  
13 were submitted and are currently being considered by the City's Hearing Examiner.

14 G. Consistent with subsection 23.76.062.D and Sections 25.05.055 and 25.05.070 of the  
15 Seattle Municipal Code, the City Council may not take action to approve legislation enacting a  
16 proposal that is subject to an appeal under the State Environmental Policy Act (SEPA).

17 Resolution of all appeals of the Comprehensive Plan FEIS is not expected until after June 30,  
18 2025, which would delay the ability of the City Council to amend the Comprehensive Plan and  
19 pass implementing development regulations.

20 H. If the City does not enact interim legislation to meet the requirements of Chapter 322,  
21 Laws of 2023, by June 30, 2025, any denial of a permit for development of middle housing that  
22 is inconsistent with current development regulations is subject to challenge on the basis that State  
23 model code would supersede the City's development regulations. The City would also be subject

1 to potential challenge to any permitting decision related to the requirements of other State  
2 legislation cited in subsection 1.B of this ordinance.

3 I. Adopting interim legislation at this time, as an alternative to allowing the State model  
4 code to apply automatically, is necessary to ensure that the requirements governing approval of  
5 permits for middle housing meet the minimum requirements of Chapter 322, Laws of 2023, and  
6 to ensure that regulations for middle housing development are sufficiently clear and complete for  
7 the issuance of permits by the City. Interim legislation will also ensure compliance with other  
8 new State requirements cited in subsection 1.B of this ordinance.

9 Section 2. The interim development regulations set forth in this ordinance shall be in  
10 effect for a period of one year from the effective date of this ordinance and shall automatically  
11 expire after the one-year period unless the same is extended as provided by statute, or unless  
12 terminated sooner by the City Council.

13 Section 3. Pursuant to RCW 36.70A.390, the Council will hold a public hearing prior to  
14 adoption or within 60 days of adoption of this interim zoning legislation to take public testimony  
15 and to consider adopting further findings.

16 Section 4. Under RCW 36.70A.390, the Council approves the following work plan for  
17 the development of permanent regulations to address the issues in this ordinance and directs the  
18 Office of Planning and Community Development to transmit proposed legislation to the Council  
19 for adoption after resolution of any appeals under SEPA.

|   |   |
|---|---|
| Mayor Transmits Legislation to Council                                  | Anticipated May 2025  |
| Council Deliberations and Public Hearing on Proposed Permanent Controls | Anticipated June through August 2025                                      |
| Permanent Controls Effective  | Anticipated September 2025, subject to date of resolution of SEPA appeals |

1 Section 5. Based on the authority of RCW 36.70A.390 and the findings in Section 1 of  
2 this ordinance, Section 23.76.062 of the Seattle Municipal Code is waived for the adoption of  
3 this ordinance.

4 Section 6. Based on the findings of fact set forth in Section 1 of this ordinance, the City  
5 Council may renew these interim regulations for one or more six-month periods in accordance  
6 with RCW 36.70A.390.

7 Section 7. Section 23.22.062 of the Seattle Municipal Code, last amended by Ordinance  
8 126157, is amended as follows:

9 **23.22.062 Unit lot subdivisions**

10 \* \* \*

11 G. Unit lot subdivision shall not result in an accessory dwelling unit that is located on a  
12 different unit lot than the principal unit with which the accessory dwelling unit is associated.

13 Section 8. Section 23.24.045 of the Seattle Municipal Code, last amended by Ordinance  
14 126157, is amended as follows:

15 **23.24.045 Unit lot subdivisions**

16 \* \* \*

17 G. Unit lot subdivision shall not result in an accessory dwelling unit that is located on a  
18 different unit lot than the principal unit with which the accessory dwelling unit is associated.

19 Section 9. Section 23.34.011 of the Seattle Municipal Code, last amended by Ordinance  
20 126509, is amended as follows:

21 **23.34.011 NR1, NR2, and NR3 zones, function, and locational criteria**

22 A. Function. An area that provides (~~predominantly detached single-family structures~~  
23 ~~on lot sizes compatible with the existing pattern of development and the character of~~

neighborhood residential areas)) for the development of detached, attached, and stacked dwelling units within a predominately three-story height limit.

\* \* \*

Section 10. Section 23.44.006 of the Seattle Municipal Code, last amended by Ordinance 126858, is amended as follows:

**23.44.006 Principal uses permitted outright**

The following principal uses are permitted outright in neighborhood residential zones:

A. Single-family dwelling unit;

B. ~~((In RSL zones, apartments))~~ Apartments, carriage houses, cottage housing development, rowhouse development, and townhouse developments;

\* \* \*

Section 11. Section 23.44.010 of the Seattle Municipal Code, last amended by Ordinance 126685, is amended as follows:

**23.44.010 Minimum lot area and lot coverage**

\* \* \*

C. ~~((Maximum lot coverage 1.))~~ The maximum lot coverage permitted for principal and accessory structures is ~~((as provided in Table B for 23.44.010))~~ 50 percent.

| <b><del>((Table B for 23.44.010</del></b> |                             |   |
|---|-----------------------------|---|
| <b><del>Maximum lot coverage</del></b>    |                             |   |
| <b>Zone</b>                               | <b>Lot size</b>             | <b>Maximum lot coverage</b>                   |
| NR1, NR2, and NR3                         | Less than 5,000 square feet | 1,000 square feet plus 15 percent of lot area |
|   | 5,000 square feet or more   | 35 percent of lot area                        |
| RSL                                       | All lots                    | 50 percent of lot area                        |

~~2. For purposes of computing maximum lot coverage, only those portions of a lot that measure at least 10 feet in all directions shall be included in lot coverage calculations, except~~

1 ~~for portions of a lot that are used for access or that are granted a waiver under subsections~~  
2 ~~23.22.100.D, 23.24.040.B, or 23.28.030.A.4 for the purpose of providing access.))~~

3 \* \* \*

4 Section 12. Section 23.44.011 of the Seattle Municipal Code, last amended by Ordinance  
5 126685, is amended as follows:

6 **23.44.011 Floor area in neighborhood residential zones**

7 A. Gross floor area. In neighborhood residential zones, gross floor area includes exterior  
8 corridors, breezeways, and stairways that provide building circulation and access to dwelling  
9 units or sleeping rooms. Balconies, patios, and decks that are associated with a single dwelling  
10 unit or sleeping room and that are not used for common circulation, and ground-level walking  
11 paths, are not considered gross floor area.

12 B. Floor area ratio (FAR) limits.

13 ~~((1. The FAR limit on lots developed with a single family dwelling unit as the~~  
14 ~~principal use in NR1, NR2, and NR3 zones, is 0.5, except that lots with less than 5,000 square~~  
15 ~~feet of lot area can include up to 2,500 square feet of total chargeable floor area. The applicable~~  
16 ~~FAR limit applies to the total chargeable floor area of all structures on the lot.~~

17 ~~2. The FAR limit in RSL zones is 0.75. The applicable FAR limit applies to the~~  
18 ~~total chargeable floor area of all structures on the lot.)) The FAR limit in neighborhood~~

19 residential zones for lots with residential uses is as shown in Table A for 23.44.011. The

20 applicable FAR limit applies to the total chargeable floor area of all structures on the lot.

| <b><u>Table A for 23.44.011</u></b>                                    |   |
|--|---|
| <b><u>Floor area ratio (FAR) in neighborhood residential zones</u></b> |   |
| <b><u>Density (dwelling units per lot size)</u></b>                    | <b><u>FAR</u></b>   |
| <u>Less dense than 1 unit / 4,000 square feet</u>                      | <u>0.6 in NR1, NR2, and NR3 zones</u><br><u>0.75 in RSL zones</u> |
| <u>1 unit / 4,000 square feet to 1 unit / 2,201 square feet</u>        | <u>0.8</u>  |

| <b>Table A for 23.44.011</b>                                    |            |
|---|------------|
| <b>Floor area ratio (FAR) in neighborhood residential zones</b> |            |
| <b>Density (dwelling units per lot size)</b>                    | <b>FAR</b> |
| <u>1 unit / 2,200 square feet to 1 unit / 1,601 square feet</u> | <u>1.0</u> |
| <u>1 unit / 1,600 square feet or denser</u>                     | <u>1.2</u> |

1 C. The following floor area is exempt from FAR limits:

2 1. All stories, or portions of stories, that are underground.

3 2. All portions of a story that extend no more than 4 feet above existing or

4 finished grade, whichever is lower, excluding access.

5 ~~((3. In NR1, NR2, and NR3 zones:~~

6 ~~a. Any floor area contained in an accessory dwelling unit;~~

7 ~~b. Either up to 500 additional square feet of floor area in any accessory~~  
8 ~~structure that is not a detached accessory dwelling unit, or up to 250 square feet of floor area in~~  
9 ~~an attached garage.))~~

10 3. Common walls separating individual attached dwelling units.

11 4. In RSL zones, 50 percent of the chargeable floor area contained in structures  
12 built prior to January 1, 1982, as single-family dwelling units that will remain in residential use,  
13 regardless of the number of dwelling units within the existing structure, provided the exemption  
14 is limited to the gross square footage in the single-family dwelling unit as of January 1, 1982.

15 ~~((D. In NR1, NR2, and NR3 zones, additions to a single family dwelling unit existing on~~  
16 ~~the effective date of the ordinance introduced as Council Bill 119544 may exceed the FAR limit~~  
17 ~~in subsection 23.44.011.B.1 if the addition adds floor area equal to or less than 20 percent of the~~  
18 ~~floor area that existed on the effective date of the ordinance introduced as Council Bill 119544.~~  
19 ~~Only one addition to any single family dwelling unit may be exempted under this subsection~~  
20 ~~23.44.011.D.))~~

1 Section 13. Section 23.44.012 of the Seattle Municipal Code, last amended by Ordinance  
2 126600, is amended as follows:

3 **23.44.012 Height limits**

4 A. Maximum height established. The provisions of this Section 23.44.012 apply in  
5 neighborhood residential zones, except as provided elsewhere in the Land Use Code for specific  
6 types of structures or structures in particular locations.

7 ~~((1. Except as provided in subsections 23.44.012.A.2 and 23.44.012.A.3, the))~~

8 The maximum permitted height for any structure not located in a required yard is ~~((30))~~ 32 feet.

9 ~~((2. In NR1, NR2, and NR3 zones, the maximum permitted height for any  
10 structure on a lot 30 feet or less in width is 25 feet.~~

11 ~~3. In NR1, NR2, and NR3 zones, for a lot or unit lot of any width, if the area of  
12 the largest rectangle or other quadrilateral that can be drawn within the lot lines of the lot or unit  
13 lot is less than 3,200 square feet the maximum permitted height for any structure on that lot shall  
14 be 18 feet. Additional height shall be allowed, subject to the limit that would otherwise apply  
15 under subsections 23.44.012.A.1 and 23.44.012.A.2, provided that the elevation at the top of the  
16 exterior walls of the structure, exclusive of pitched roofs, does not exceed the average of the  
17 elevations at the tops of the walls of single-family residences on abutting lots within the same  
18 zone. The limit of this subsection 23.44.012.A.3 shall not apply to additions to single-family  
19 residences existing as of February 1, 2013, that do not exceed the greater of 1,000 square feet of  
20 new gross floor area or the amount of gross floor area on any one floor of the existing house.))~~

\* \* \*

Section 14. Section 23.44.014 of the Seattle Municipal Code, last amended by Ordinance 127099, is amended as follows:

**23.44.014 Yards**

A. General

1. Yards are required for every lot in a neighborhood residential zone.

2. In the case of a through lot, each yard abutting a street, except a side yard, shall be a front yard. Rear yard provisions shall not apply to the through lot, except pursuant to Section 23.40.030 or 23.40.035.

3. Setbacks from a street or alley may be required in order to meet the provisions of Section 23.53.015.

4. Setbacks from access easements may also be required for principal structures according to the standards in ((subsections ~~23.53.025.C.2 and 23.53.025.D.6~~) subsection 23.53.025.C.6).

B. Required yards for neighborhood residential zones are shown in Table A for 23.44.014.

| <b>((Table A for 23.44.014<br/>Required yards in neighborhood residential zones</b> |  |   |
|---|--|---|
| <b>Yard</b>   | <b>NR1, NR2, and NR3</b>   | <b>RSL</b>  |
| Front   | 20 feet or the average of the front yards of the single family structures on either side, whichever is less <sup>1</sup> | 10 feet   |
| Rear  | 25 feet or 20 percent of lot depth, whichever is less, except that it may never be less than 10 feet <sup>2</sup>        | 10 feet except that, if the rear yard abuts an alley, there is no rear yard requirement |
| Side  | 5 feet <sup>3,4,5</sup>  | 5 feet <sup>5</sup>   |

Footnotes to Table A for 23.44.014  
<sup>1</sup> – If the natural gradient or slope (as measured from the front line of the lot for a distance of 60 feet or the full depth of the lot, whichever is less) is in excess of 35 percent, the required front yard depth shall be the lesser of: 20 feet less 1 foot for each one percent of gradient or

~~slope in excess of 35 percent; or the average of the front yards on either side.  
<sup>2</sup> If the rear lot line abuts an alley, the centerline of the alley between the side lot lines extended shall be assumed to be the rear lot line for purposes of the provision of rear yard and the determination of lot depth; provided, that at no point shall the principal structure be closer than 5 feet to the alley.  
<sup>3</sup> In the case of a reversed corner lot, the key lot of which is in a neighborhood residential zone, the width of the side yard on the street side of the reversed corner lot shall not be less than 10 feet.  
<sup>4</sup> If any side street lot line is a continuation of the front lot line of an abutting neighborhood residential zoned lot, whether or not separated by an alley, the width of the street side yard shall not be less than 10 feet.  
<sup>5</sup> No side yard is required from a side lot line that abuts an alley.))~~

1

**Table A for 23.44.014**  
**Required yards in neighborhood residential zones**

|              |   |
|--------------|---|
| <u>Front</u> | <u>10 feet</u>  |
| <u>Rear</u>  | <u>10 feet except that if the rear yard abuts an alley, no rear yard is required <sup>1</sup></u> |
| <u>Side</u>  | <u>5 feet, except that if the side yard abuts an alley, no side yard is required <sup>1</sup></u> |

Footnote for Table A for 23.44.090

<sup>1</sup> On a reversed corner lot in a neighborhood residential zone, the yard on the side street lot line shall be 10 feet and the rear yard is 5 feet.

2

3

\* \* \*

4

Section 15. Section 23.44.016 of the Seattle Municipal Code, last amended by Ordinance

5

127099, is amended as follows:

6

**23.44.016 - Parking and garages**

7

\* \* \*

8

D. Parking and garages in required yards. Parking and garages are regulated as described

9

in subsections 23.44.016.D.1 through 23.44.016.D.12. Unless otherwise specified, the terms

1 "garage" or "garages" as used in this subsection 23.44.016.D refer to both attached and detached  
2 garages.

3 1. Parking and garages shall not be located (~~(in the required front yard)~~) within 20  
4 feet of a front lot line except as provided in subsections 23.44.016.D.7, 23.44.016.D.9,  
5 23.44.016.D.10, 23.44.016.D.11, and 23.44.016.D.12.

6 2. Parking and garages shall not be located in a required side yard abutting a street  
7 or the first 10 feet of a required rear yard abutting a street except as provided in subsections  
8 23.44.016.D.7, 23.44.016.D.9, 23.44.016.D.10, 23.44.016.D.11, and 23.44.016.D.12.

9 3. Garages shall not be located in a required side yard that abuts the rear or side  
10 yard of another lot or in that portion of the rear yard of a reversed corner lot within 5 feet of the  
11 key lot's side lot line unless:

12 a. The garage is a detached garage and extends only into that portion of a  
13 side yard that is either within 35 feet of the centerline of an alley or within 25 feet of any rear lot  
14 line that is not an alley lot line; or

15 b. An agreement between the owners of record of the abutting properties,  
16 authorizing the garage in that location, is executed and recorded, pursuant to subsection  
17 23.44.014.C.2.a.

18 4. Detached garages with vehicular access facing an alley shall not be located  
19 within 12 feet of the centerline of the alley except as provided in subsections 23.44.016.D.9,  
20 23.44.016.D.10, 23.44.016.D.11, and 23.44.016.D.12.

21 5. Attached garages shall not be located within 12 feet of the centerline of any  
22 alley, nor within 12 feet of any rear lot line that is not an alley lot line, except as provided in  
23 subsections 23.44.016.D.9, 23.44.016.D.10, 23.44.016.D.11, and 23.44.016.D.12.

1                   6. On a reversed corner lot, no garage shall be located in that portion of the  
2 required rear yard that abuts the required front yard of the adjoining key lot unless the provisions  
3 of subsection 23.44.016.D.9 apply.

4                   7. If access to required parking passes through a required yard, automobiles,  
5 motorcycles, and similar vehicles may be parked on the open access located in a required yard.

6                   8. Trailers, boats, recreational vehicles, and similar equipment shall not be parked  
7 in required front and side yards or the first 10 feet of a rear yard measured from the rear lot line,  
8 or measured 10 feet from the centerline of an alley if there is an alley adjacent to the rear lot line,  
9 unless fully enclosed in a structure otherwise allowed in a required yard by this subsection  
10 23.44.016.D.

11                  9. Lots with uphill yards abutting streets. In NR1, NR2, and NR3 zones, parking  
12 for one two-axle or one up to four-wheeled vehicle may be established in a required yard

1 abutting a street according to subsection 23.44.016.D.9.a or 23.44.016.D.9.b only if access to  
2 parking is permitted through that yard pursuant to subsection 23.44.016.B.

3 a. Open parking space

4 1) The existing grade of the lot slopes upward from the street lot  
5 line an average of at least 6 feet above sidewalk grade at a line that is 10 feet from the street lot  
6 line; and

7 2) The parking area shall be at least an average of 6 feet below the  
8 existing grade prior to excavation and/or construction at a line that is 10 feet from the street lot  
9 line; and

10 3) The parking space shall be no wider than 10 feet for one parking  
11 space at the parking surface and no wider than 20 feet for two parking spaces if permitted as  
12 provided in subsection 23.44.016.D.12.

13 b. Terraced garage

14 1) The height of a terraced garage is limited to no more than 2 feet  
15 above existing or finished grade, whichever is lower, for the portions of the garage that are 10  
16 feet or more from the street lot line. The ridge of a pitched roof on a terraced garage may extend  
17 up to 3 feet above this 2-foot height limit. All parts of the roof above the 2-foot height limit shall  
18 be pitched at a rate of not less than 4:12. No portion of a shed roof shall be permitted to extend

1 beyond the 2-foot height limit of this provision. Portions of a terraced garage that are less than 10  
2 feet from the street lot line shall comply with the height standards in subsection 23.44.016.E.2;

3                                   2) The width of a terraced garage structure shall not exceed 14 feet  
4 for one two-axle or one up to four-wheeled vehicle, or 24 feet if permitted to have two two-axle  
5 or two up to four-wheeled vehicles as provided in subsection 23.44.016.D.12;

6                                   3) All above ground portions of the terraced garage shall be  
7 included in lot coverage; and

8                                   4) The roof of the terraced garage may be used as a deck and shall  
9 be considered to be a part of the garage structure even if it is a separate structure on top of the  
10 garage.

11                                   10. Lots with downhill yards abutting streets. In NR1, NR2, and NR3 zones,  
12 parking, either open or enclosed in an attached or detached garage, for one two-axle or one up to

1 four-wheeled vehicle may be located in a required yard abutting a street if the following  
2 conditions are met:

3 a. The existing grade slopes downward from the street lot line that the  
4 parking faces;

5 b. For front yard parking, the lot has a vertical drop of at least 20 feet in  
6 the first 60 feet, measured along a line from the midpoint of the front lot line to the midpoint of  
7 the rear lot line;

8 c. Parking is not permitted in required side yards abutting a street;

9 d. Parking in a rear yard complies with subsections 23.44.016.D.2,  
10 23.44.016.D.5 and 23.44.016.D.6; and

11 e. Access to parking is permitted through the required yard abutting the  
12 street by subsection 23.44.016.B.

13 11. Through lots. On through lots less than 125 feet in depth in NR1, NR2, and  
14 NR3 zones, parking, either open or enclosed in an attached or detached garage, for one two-axle  
15 or one up to four-wheeled vehicle may be located in one of the required front yards. The front  
16 yard in which the parking may be located shall be determined by the Director based on the  
17 location of other garages or parking areas on the block. If no pattern of parking location can be  
18 determined, the Director shall determine in which yard the parking shall be located based on the  
19 prevailing character and setback patterns of the block.

20 12. Lots with uphill yards abutting streets or downhill or through lot front yards  
21 fronting on streets that prohibit parking. In NR1, NR2, and NR3 zones, parking for two two-axle  
22 or two up to four-wheeled vehicles may be located in uphill yards abutting streets or downhill or  
23 through lot front yards as provided in subsections 23.44.016.D.9, 23.44.016.D.10, or

1 23.44.016.D.11 if, in consultation with the Seattle Department of Transportation, it is found that  
2 uninterrupted parking for 24 hours is prohibited on at least one side of the street within 200 feet  
3 of the lot line over which access is proposed. The Director may authorize a curb cut wider than  
4 would be permitted under Section 23.54.030 if necessary, for access.

5 \* \* \*

6 Section 16. Section 23.44.017 of the Seattle Municipal Code, last amended by Ordinance  
7 126685, is amended as follows:

8 **23.44.017 Density limits**

9 A. In NR1, NR2, and NR3 zones, only one single-family dwelling unit is allowed per lot,  
10 except that up to two accessory dwelling units may also be approved pursuant to Section  
11 23.44.041(~~(, and except as approved as part of an administrative conditional use permit under~~  
12 ~~Section 25.09.260, a clustered housing planned development under Section 23.44.024, or a~~  
13 ~~planned residential development under Section 23.44.034)).~~

14 B. The following provisions apply in RSL zones:

15 1. The minimum lot area per principal dwelling unit is 2,000 square feet.

16 2. (~~Except as provided in subsection 23.44.017.B.3, when calculation of the~~  
17 ~~number of dwelling units allowed according to subsection 23.44.017.B.1 results in a fraction of a~~  
18 ~~unit, any fraction up to and including 0.85 constitutes zero additional units, and any fraction over~~  
19 ~~0.85 constitutes one additional unit.~~

20 3.)) For lots in existence on April 19, 2019, if the number of dwelling units  
21 allowed according to subsection 23.44.017.B.1 equals less than two, two units are allowed.

22 C. Lot density exceptions for lots that do not contain any riparian corridors; wetlands and  
23 their buffers; submerged lands and areas within the shoreline setback; or designated non-

1 disturbance area in steep slopes. For the purposes of this subsection 23.44.017.C, dwelling units  
2 include both principal and accessory dwelling units.

3 1. A lot located more than one-quarter mile walking distance away from a major  
4 transit stop may be developed with up to four dwelling units if the lot meets the following  
5 criteria:

6 a. The lot was in existence as a legal building site prior to March 28,  
7 2025;

8 b. The lot has not been divided through a subdivision or short  
9 subdivision since March 28, 2025; and

10 c. The lot does not contain any riparian corridors; wetlands and their  
11 buffers; submerged lands and areas within the shoreline setback; or designated non-disturbance  
12 area in steep slopes.

13 2. A lot located within one-quarter mile walking distance of a major transit stop  
14 may be developed with up to six units if the lot meets the following criteria:

15 a. The lot was in existence prior to March 28, 2025;

16 b. The lot has not been divided through a subdivision or short  
17 subdivision since March 28, 2025; and

18 c. The lot does not contain any riparian corridors; wetlands and their  
19 buffers; submerged lands and areas within the shoreline setback; or designated non-disturbance  
20 area in steep slopes.

21 3. Notwithstanding subsection 23.44.017.C.1, a lot located more than one-quarter  
22 mile walking distance away from a major transit stop may be developed with up to six units if  
23 the lot meets the following criteria:

1                                    a. The lot was in existence as a legal building site prior to March 28,  
2 2025;

3                                    b. The lot has not been divided through a subdivision or short  
4 subdivision since March 28, 2025;

5                                    c. The lot does not contain any riparian corridors; wetlands and their  
6 buffers; submerged lands and areas within the shoreline setback; or designated non-disturbance  
7 area in steep slopes;

8                                    d. A regulatory agreement, covenant, or other legal instrument, recorded  
9 on the title of the property and enforceable by the City of Seattle, ensures affordability for  
10 income-eligible households for 50 years in at least two dwelling units as follows:

11                                    1) For rental housing, restricted units serving households with  
12 incomes no higher than 60 percent of median income at initial occupancy and with rents not  
13 exceeding 30 percent of 60 percent of median income; or

14                                    2) For ownership housing, restricted units sold to households with  
15 incomes no higher than 80 percent of median income at prices (initial sale and resale) that allow  
16 modest growth in homeowner equity while maintaining long-term affordability for income-  
17 eligible buyers, as determined by the Director of Housing;

18                                    e. The low-income units must be generally distributed throughout the  
19 development and have substantially the same functionality as unrestricted units in the  
20 development;

21                                    f. To the extent practicable, the low-income units must be comparable to  
22 the unrestricted units in terms of square footage and number of bedrooms and bathrooms;

1 g. Tenure (i.e., rental or ownership) of low-income units and unrestricted  
2 units must be the same;

3 h. The regulatory agreement, covenant, or other legal instrument must  
4 contain criteria and policies to maintain public benefit if the property is demolished or converted  
5 to a non-residential use;

6 i. For ownership developments, the low-income units must be stewarded  
7 by a qualified non-profit organization including:

8 a. Pre-purchase verification of income and other requirements for  
9 eligible households, affordable sale price calculations for approval by the Office of Housing, and  
10 execution of legal restrictions on the property; and

11 b. Post-purchase support for homeowners by facilitating resales,  
12 monitoring compliance with financial, owner occupancy, and other legal requirements, and clear  
13 communication of program guidelines and restrictions;

14 j. For purposes of this subsection 23.44.017.C.3, qualified non-profit  
15 organization means a non-profit organization that the Office of Housing determines as  
16 experienced in the development and stewardship of permanently affordable homes;

17 k. At such times as may be required by the Director of Housing but no less  
18 than annually, the property owner for rental housing or the qualified non-profit organization for  
19 ownership housing must file property reports with the Office of Housing, verified upon oath or  
20 affirmation, which shall contain such information as the Office of Housing may deem necessary  
21 to determine compliance with this subsection 23.44.017.C.3 and the regulatory agreement,  
22 covenant, or legal instrument according to subsection 23.44.017.C.3.e; and

1                   1. In RSL zones that have a mandatory housing affordability suffix, the  
2 dwelling units for which the regulatory agreement, covenant, or other legal instrument required  
3 by subsection 23.44.017.C.3.e ensures affordability as required by that subsection shall be  
4 counted towards any obligation to provide MHA-R units according to subsection 23.58C.050.A.

5           D. Lot density exceptions for lots that do contain any riparian corridors; wetlands and  
6 their buffers; submerged lands and areas within the shoreline setback; or designated non-  
7 disturbance area in steep slopes. For lots that contain any riparian corridors, wetlands and their  
8 buffers, submerged lands and areas within the shoreline setback, or designated non-disturbance  
9 area in steep slopes, applicants may choose to develop the lot with the number of dwelling units  
10 provided in the density limits in subsections 23.44.017.A and 23.44.017.B or with the number of  
11 principal and accessory dwelling units calculated as follows:

12                   1. Determine the number of units that would be allowed under subsection  
13 23.44.017.C if no environmentally critical areas were located on the lot;

14                   2. Determine the percentage of the lot that is not covered by riparian corridors,  
15 wetlands and their buffers, submerged lands and areas within the shoreline setback, or designated  
16 non-disturbance area in steep slopes; and

17                   3. Calculate the number of dwelling units by multiplying the number of units  
18 determined in subsection 23.44.017.D.1 by the percentage of the lot calculated in subsection  
19 23.44.017.D.2.

20           E. Measurement of minimum lot size and maximum density

21                   1. When calculation of the number of dwelling units allowed results in a fraction  
22 of a unit, any fraction shall be rounded down.

1                    2. Congregate residence sleeping rooms shall be treated as one-fourth of a  
2 dwelling unit for purposes of calculating density.

3                    3. In the case of a development within a unit lot subdivision, the density limit  
4 shall be applied to the parent lot as a whole.

5                    4. If dedication of right-of-way is required, permitted density shall be calculated  
6 before the dedication is made.

7                    F. For the purpose of this Section 23.44.017, designated non-disturbance area in steep  
8 slopes shall include all portions of steep slope hazard areas except the following:

9                    1. Areas that are granted relief from the prohibition of development according to  
10 Section 25.09.090;

11                    2. Areas where development is allowed under a small project waiver according to  
12 Section 25.09.090;

13                    3. Areas where development is allowed under an administrative conditional use  
14 according to Section 25.09.260; and

15                    4. Areas where intrusion into the steep slope erosion hazard area and buffer is  
16 allowed by steep slope erosion hazard area variance according to Section 25.09.290.

17                    Section 17. Section 23.44.044 of the Seattle Municipal Code, last amended by Ordinance  
18 124378, is amended as follows:

19 **23.44.044 Swimming pools**

20 Private, permanent swimming pools, hot tubs and other similar uses are permitted as accessory  
21 uses to a ~~((single family))~~ residential structure subject to the following specific development  
22 standards:

1           A. Private, permanent swimming pools, hot tubs and other similar uses over 18 inches  
2 above existing grade are subject to the development standards for accessory uses.

3           B. Private, permanent swimming pools, hot tubs and other similar uses projecting not  
4 more than 18 inches above existing grade shall not be counted in lot coverage.

5           C. Private, permanent swimming pools, hot tubs and other similar uses may be placed in  
6 a required front or rear yard, provided that:

7                   1. No part of the structure shall project more than 18 inches above existing lot  
8 grade in a required front yard; and

9                   2. No part of the structure shall be placed closer than 5 feet to any front or side lot  
10 line.

11           Section 18. Section 23.45.512 of the Seattle Municipal Code, last amended by Ordinance  
12 126855, is amended as follows:

13 **23.45.512 Density limits and ~~((family-size unit requirements))~~ minimum lot size —LR zones**

14           A. Density limits

15                   ~~((1. Except according to subsection 23.45.512.A.4, the following developments~~  
16 ~~must meet the density limits described in this subsection 23.45.512.A:~~

17                           ~~a. In LR1 zones, rowhouse development on interior lots and all~~  
18 ~~townhouse development; and~~

19                           ~~b. All development in Lowrise zones that do not have a mandatory~~  
20 ~~housing affordability suffix.~~

21                   ~~2. Development described in subsection 23.45.512.A.1))~~

22                   1. Except as provided in subsection 23.45.512.A.2 and 23.45.512.C, attached  
23 and detached dwelling units in LR1 zones and all units in LR zones that do not have a

1 mandatory housing affordability suffix shall not exceed a density of one dwelling unit per  
2 1,150 square feet of lot area(~~(, except that apartments in LR3 zones that do not have a~~  
3 ~~mandatory housing affordability suffix shall not exceed a density limit of one dwelling unit per~~  
4 ~~800 square feet)).~~

5 ~~((3. When density calculations result in a fraction of a unit, any fraction up to~~  
6 ~~and including 0.85 constitutes zero additional units, and any fraction over 0.85 constitutes one~~  
7 ~~additional unit.~~

8 4.)) 2. Low-income housing shall have a maximum density of one dwelling unit  
9 per 400 square feet of lot area.

10 ~~((B. Family-sized unit requirements in LR1 zones~~

11 ~~1. Apartment developments in LR1 zones with four or more units shall provide~~  
12 ~~at least one unit with two or more bedrooms and a minimum net unit area of 850 square feet~~  
13 ~~for every four units in the structure.~~

14 ~~2. One unit with three or more bedrooms and a minimum net unit area of 1,050~~  
15 ~~square feet may be provided in place of any two units required to include two bedrooms and a~~  
16 ~~minimum net unit area of 850 square feet.))~~

17 B. The minimum lot size for lots created through a subdivision process is the lot size  
18 necessary to allow a density of one unit.

19 C. Exceptions to density limit. For the purposes of this subsection 23.45.512.C, dwelling  
20 units include both principal and accessory dwelling units.

21 1. At least one unit is allowed on all lots existing as of March 28, 2025.

1                    2. Nursing homes, congregate housing, and assisted living facilities~~((, and~~  
2 ~~accessory dwelling units that meet the standards of Section 23.45.545))~~ are exempt from the  
3 density limit set in subsection 23.45.512.A ~~((and the requirements in subsection 23.45.512.B)).~~

4                    ~~((D.))~~ 3. Dwelling unit(s) located in structures built prior to January 1, 1982~~((;~~  
5 ~~as single-family dwelling units))~~ that will remain in residential use are exempt from the density  
6 ~~((limits))~~ limit described in subsection 23.45.512.A.

7                    ~~((E. If dedication of right-of-way is required, permitted density shall be calculated~~  
8 ~~before the dedication is made.))~~

9                    4. A lot that does not meet the minimum size necessary for four dwelling units  
10 under subsection 23.45.512.A may be developed with up to four dwelling units if:

11                    a. The lot was in existence as a legal building site prior to March 28,  
12 2025;

13                    b. The lot has not been divided through a subdivision or short  
14 subdivision since March 28, 2025; and

15                    c. The lot does not contain any riparian corridors; wetlands and their  
16 buffers; submerged lands and areas within the shoreline setback; or designated non-disturbance  
17 area in steep slopes.

18                    5. Notwithstanding subsection 23.45.512.C.4, a lot that does not meet the  
19 minimum size necessary for six units under subsection 23.45.512.A may be developed with up  
20 to six units if the lot meets the following criteria:

21                    a. The lot is located within one-quarter mile walking distance of a major  
22 transit stop;

1                                    b. The lot was in existence as a legal building site prior to March 28,  
2 2025;

3                                    c. The lot has not been divided through a subdivision or short  
4 subdivision since March 28, 2025; and

5                                    d. The lot does not contain any riparian corridors; wetlands and their  
6 buffers; submerged lands and areas within the shoreline setback; or designated non-disturbance  
7 area in steep slopes.

8                                    6. Notwithstanding subsection 23.45.512.C.4, a lot that does not meet the  
9 minimum size necessary for six units under subsection 23.45.512.A may be developed with up  
10 to six units if the lot meets the following criteria:

11                                    a. The lot is located more than one-quarter mile walking distance of a  
12 major transit stop;

13                                    b. The lot was in existence as a legal building site prior to March 28,  
14 2025;

15                                    c. The lot has not been divided through a subdivision or short  
16 subdivision since March 28, 2025;

17                                    d. The lot does not contain any riparian corridors; wetlands and their  
18 buffers; submerged lands and areas within the shoreline setback; or designated non-disturbance  
19 area in steep slopes;

20                                    e. A regulatory agreement, covenant, or other legal instrument, recorded  
21 on the title of the property and enforceable by The City of Seattle, ensures affordability for  
22 income-eligible households for 50 years in at least two dwelling units as follows:

1                                    1) For rental housing, restricted units serving households with  
2 incomes no higher than 60 percent of median income at initial occupancy and with rents not  
3 exceeding 30 percent of 60 percent of median income; or

4                                    2) For ownership housing, restricted units sold to households with  
5 incomes no higher than 80 percent of median income at prices (initial sale and resale) that allow  
6 modest growth in homeowner equity while maintaining long-term affordability for income-  
7 eligible buyers, all as determined by the Director of Housing;

8                                    f. The low-income units must be generally distributed throughout the  
9 development and have substantially the same functionality as unrestricted units in the  
10 development;

11                                    g. To the extent practicable, the low-income units must be comparable to  
12 unrestricted units in terms of square footage and number of bedrooms and bathrooms;

13                                    h. Tenure (i.e., rental or ownership) of low-income units and unrestricted  
14 units must be the same;

15                                    i. The regulatory agreement, covenant, or other legal instrument must  
16 contain criteria and policies to maintain public benefit if the property is demolished or converted  
17 to a non-residential use;

18                                    j. For ownership developments, the low-income units must be stewarded  
19 by a qualified non-profit organization including:

20                                    1) Pre-purchase verification of income and other requirements for  
21 eligible households, affordable sale price calculations for approval by the Office of Housing, and  
22 execution of legal restrictions on the property; and



1                            b. Determine the percentage of the lot that is not covered by riparian  
2 corridors, wetlands and their buffers, submerged lands and areas within the shoreline setback, or  
3 designated non-disturbance area in steep slopes;

4                            c. Calculate the number of dwelling units by multiplying the number of  
5 units determined in subsection 23.45.512.C.7.a by the percentage of the lot calculated in  
6 subsection 23.45.512.C.7.b.

7                            ~~((F.))~~ 8. Adding units to existing structures

8                            ~~((1.))~~ a. One additional dwelling unit may be added to an existing  
9 residential structure regardless of the density restrictions in subsection 23.45.512.A (~~and the~~  
10 requirements in subsection 23.45.512.B)). An additional unit is allowed only if the proposed  
11 additional unit is to be located entirely within an existing structure, and no additional floor area  
12 to accommodate the new unit is proposed to be added to the existing structure.

13                            ~~((2.))~~ b. For the purposes of this subsection (~~23.45.512.F))~~  
14 23.45.512.C.8, "existing residential structures" are those that were established under permit as  
15 of October 31, 2001, or for which a permit has been granted and the permit has not expired as  
16 of October 31, 2001.

17                            D. Measurement of minimum lot size and maximum density

18                            1. When density calculations result in a fraction of a unit, any fraction up to and  
19 including 0.85 constitutes zero additional units, and any fraction over 0.85 constitutes one  
20 additional unit.

21                            2. If dedication of right-of-way is required, permitted density shall be calculated  
22 before the dedication is made.

1                   3. In the case of a development within a unit lot subdivision, the density limit  
2 shall be applied to the parent lot as a whole.

3                   4. When calculating maximum density, the number of dwelling units shall  
4 include accessory dwelling units and principal dwelling units.

5                   E. For the purpose of this Section 23.45.512, designated non-disturbance area in steep  
6 slopes shall include all portions of steep slope hazard areas except the following:

7                   1. Areas that are granted relief from the prohibition of development according to  
8 Section 25.09.090;

9                   2. Areas where development is allowed under a small project waiver according to  
10 Section 25.09.090;

11                   3. Areas where development is allowed under an administrative conditional use  
12 according to Section 25.09.260; and

13                   4. Areas where intrusion into the steep slope erosion hazard area and buffer is  
14 allowed by steep slope erosion hazard area variance according to Section 25.09.290.

15                   Section 19. Section 23.45.514 of the Seattle Municipal Code, last amended by Ordinance  
16 126685, is amended as follows:

17 **23.45.514 - Structure height**

18                   A. Subject to the additions and exceptions allowed as set forth in this Section 23.45.514,  
19 the height limits for structures in LR zones are as shown on Table A for 23.45.514.

**Table A for 23.45.514  
 Structure height for LR zones (in feet)**

| Housing type                        | LR1                            | LR2             | LR3 outside urban centers, urban villages, and Station Area Overlay Districts | LR3 in urban centers, urban villages, and Station Area Overlay Districts |
|-------------------------------------|--------------------------------|-----------------|---|--|
| Cottage housing developments        | 22                             | 22              | 22  | 22   |
| Rowhouse and townhouse developments | <del>((30))</del><br><u>32</u> | 40 <sup>1</sup> | 40 <sup>1</sup>   | 50 <sup>1</sup>  |
| Apartments                          | <del>((30))</del><br><u>32</u> | 40 <sup>1</sup> | 40 <sup>1</sup>   | 50 <sup>2</sup>  |

Footnotes for Table A for 23.45.514

<sup>1</sup> Except that the height limit is ~~((30))~~ 32 feet in zones without a mandatory housing affordability suffix.

<sup>2</sup> Except that the height limit is 40 feet in zones without a mandatory housing affordability suffix.

1  
2  
3  
4  
5  
6  
7  
8

\* \* \*

Section 20. Section 23.45.518 of the Seattle Municipal Code, last amended by Ordinance 126685, is amended as follows:

**23.45.518 Setbacks (~~and separations~~)**

A. LR zones

1. Required setbacks for the LR zones are as shown in Table A for 23.45.518 and subsection 23.45.518.A.2.

**((Table A for 23.45.518  
 Required setbacks in LR zones measured in feet**

| All LR zones   | Category of residential use                                   |   |                         |  |
|--|---|---|-------------------------|--|
| Setback  | Cottage housing developments and single-family dwelling units | Rowhouse developments   | Townhouse developments  | Apartments                                       |
| Front  | 7 average;<br>5 minimum                                       | 5 minimum   | 7 average;<br>5 minimum | 5 minimum  |
| Rear   | 0 with alley;<br>7 if no alley                                | 0 with alley;<br>With no alley:<br>7 average;<br>5 minimum  | 7 average;<br>5 minimum | 10 minimum with alley;<br>15 minimum if no alley |
| Side setback for facades 40 feet or less in length <sup>1</sup>      | 5   | 0 where abutting another rowhouse development <sup>2</sup> ; otherwise 3.5; except that on side lot lines that abut a neighborhood residential zone, the setback is 5                       | 5                       | 5  |
| Side setback for facades greater than 40 feet in length <sup>3</sup> | 5 minimum   | 0 where abutting another rowhouse development <sup>2</sup> ; otherwise 3.5; except that on side lot lines that abut a neighborhood residential zone, the setback is 7 average;<br>5 minimum | 7 average;<br>5 minimum | 7 average;<br>5 minimum                          |

**Footnotes to Table A for 23.45.518**

<sup>1</sup>—Additions to existing nonconforming structures built prior to April 11, 2011, shall be set back a sufficient distance so that the addition complies with setback standards. For any portion of a structure built before April 11, 2011, the average setback applies only to a new addition

**~~((Table A for 23.45.518  
 Required setbacks in LR zones measured in feet~~**

| <del>All LR zones</del> | <del>Category of residential use</del> |
|-------------------------|--|
|-------------------------|--|

~~built after that date. If an addition is to a side wall extended vertically, the existing side wall line may be continued by the addition, provided that the average setback of 7 feet or the 5-foot minimum setback is met.~~

~~<sup>2</sup> If the side facades of rowhouse developments on abutting lots are not joined, then a 3.5-foot setback is required, except the side setback may be reduced to zero if the abutting lot contains a rowhouse development and an easement is provided along the shared lot line of the abutting lot sufficient to leave a 3.5-foot separation between the principal structures of the abutting rowhouse developments.~~

~~<sup>3</sup> Portions of structures that qualify for the FAR exemption in subsection 23.45.510.D.5 are not considered part of the facade length for the purposes of determining the side setback requirement.))~~

1

**Table A for 23.45.518  
 Required setbacks in LR zones**

|              |   |
|--------------|---|
| <u>Front</u> | <u>7 feet average, 5 feet minimum</u>   |
| <u>Rear</u>  | <u>If rear lot line abuts an alley, 0 feet<br/>         Otherwise, 7 feet average, 5 feet minimum</u> |
| <u>Side</u>  | <u>5 feet</u>   |

2

2. Upper-level setbacks in LR2 and LR3 zones

3

a. An upper-level setback of 12 feet from the front lot line is required for

4

all portions of a structure above the following height:

5

1) Forty-four feet for zones with a height limit of 40 feet; and

6

2) Fifty-four feet for zones with a height limit of 50 feet.

7

b. An upper-level setback of 12 feet from each side or rear lot line that

8

abuts a lot zoned (~~(single-family))~~ neighborhood residential is required for all portions of the

9

structure above 34 feet in height.

1 c. Projections allowed in subsection 23.45.518.H are allowed in upper-  
2 level setbacks.

3 d. Structures allowed in subsection 23.45.518.I are not allowed in upper-  
4 level setbacks.

5 e. Rooftop features are not allowed in upper-level setback except as  
6 follows:

7 1) A pitched roof, other than a shed roof or butterfly roof, is  
8 allowed in the upper-level setback if all parts of the roof are pitched at a rate of not less than  
9 6:12 and not more than 12:12.

10 2) Open railings may extend up to 4 feet above the height at  
11 which the setback begins.

12 3) Parapets may extend up to 2 feet above the height at which the  
13 setback begins.

14 \* \* \*

15 F. Separations between multiple structures

16 1. In LR and MR zones, the minimum required separation between principal  
17 structures at any two points on different interior facades is 10 feet, except for cottage housing  
18 developments, and principal structures separated by a driveway or parking aisle.

19 2. In LR and MR zones, if principal structures are separated by a driveway or  
20 parking aisle, the minimum required separation between the principal structures is 2 feet  
21 greater than the required width of the driveway or parking aisle, provided that the separation is  
22 not required to be any greater than 24 feet. If principal structures are separated by a driveway

1 or parking aisle, projections that enclose floor area may extend a maximum of 3 feet into the  
2 required separation if they are at least 8 feet above finished grade.

3 ~~((3. Cottage housing developments in LR and MR zones:~~

4 ~~a. The minimum required separation between principal structures at any~~  
5 ~~two points on different interior facades is 6 feet, unless there is a principal entrance on an~~  
6 ~~interior facade, in which case the minimum separation required from that facade is 10 feet.~~

7 ~~b. Facades of principal structures shall be separated from facades of~~  
8 ~~accessory structures by a minimum of 3 feet.))~~

9 \* \* \*

10 J. Exceptions for existing ~~((single-family))~~ structures

11 1. In all multifamily zones, certain additions to a ~~((single-family dwelling unit))~~  
12 residential structure may extend into a required side setback if the structure is already  
13 nonconforming with respect to that setback, and if the presently nonconforming section is at  
14 least 60 percent of the total width of the respective facade of the structure prior to the addition.  
15 The line formed by the nonconforming wall of the structure shall be the limit to which any  
16 additions may be built, which may extend up to the height limit and may include basement  
17 additions (Exhibit D for 23.45.518), provided that additions shall be at least 3 feet from the  
18 side lot line.

19 2. An existing single-family dwelling unit in a LR zone may be converted to a  
20 multifamily use without conforming to setback standards ~~((for apartments))~~ in subsection  
21 23.45.518.A, provided that the building envelope is not changed. For the purposes of this  
22 subsection 23.45.518.J.2, "existing single-family dwelling unit" is one that was established

1 under permit as of October 31, 2001, or for which a permit has been granted and the permit has  
2 not expired on October 31, 2001.

3 \* \* \*

4 Section 21. Section 23.45.522 of the Seattle Municipal Code, last amended by Ordinance  
5 126157, is amended as follows:

6 **23.45.522 Amenity area**

7 A. Amount of amenity area (~~required for rowhouse and townhouse developments and~~  
8 ~~apartments in LR zones~~))

9 1. The required amount of amenity area (~~for rowhouse and townhouse~~  
10 ~~developments and apartments~~)) in LR zones is equal to 25 percent of the lot area.

11 (~~2. A minimum of 50 percent of the required amenity area shall be provided at~~  
12 ~~ground level, except that amenity area provided on the roof of a structure that meets the~~  
13 ~~provisions of subsection 23.45.510.D.5 may be counted as amenity area provided at ground~~  
14 ~~level.~~

15 3. ~~For rowhouse and townhouse developments, amenity area required at ground~~  
16 ~~level may be provided as either private or common space.~~

17 4. ~~For apartments, amenity area required at ground level shall be provided as~~  
18 ~~common space.~~))

19 2. In LR zones, a minimum of 50 percent of the required amenity area shall be  
20 provided at ground level or within 4 feet of existing grade.

21 (~~B. Amenity area requirements for cottage housing developments in all multi-family~~  
22 ~~zones~~

23 1. ~~A minimum of 300 square feet of amenity area is required for each cottage.~~

1                   ~~2. A minimum of 150 square feet of amenity area is required for each carriage~~  
2 ~~house.~~

3                   ~~3. The required quantity shall be allocated as follows:~~

4                           ~~a. Half of the amenity area required for each cottage, and all of the~~  
5 ~~amenity area required for each carriage house, shall be provided as common amenity area; and~~

6                           ~~b. Half of the amenity area required for each cottage shall be provided as~~  
7 ~~private amenity area for that unit.~~

8                   ~~4. The required common amenity area may be divided into no more than two~~  
9 ~~separate areas and shall:~~

10                           ~~a. have cottages or carriage houses abutting on at least two sides;~~

11                           ~~b. be in a location central to the cottage housing development; and~~

12                           ~~c. have no horizontal dimension of less than 10 feet.~~

13                   ~~5. Carriage houses shall have stairs that provide access to the common amenity~~  
14 ~~area.~~

15                   ~~C. Amount of amenity area required in MR and HR zones.))~~ The required amount of  
16 amenity area in MR and HR zones is equal to ~~((5))~~ five percent of the total gross floor area of a  
17 residential structure ~~((in residential use, except that cottage housing developments shall meet~~  
18 ~~the standards in subsection 23.45.522.B.~~

19                   ~~D.))~~ B. General requirements. Required amenity areas shall meet the following  
20 conditions:

21                           1. All units shall have access to a common or private amenity area.

22                           2. Enclosed amenity areas

23                                   a. In LR zones, an amenity area shall not be enclosed within a structure.





1 ~~((Table A for 23.45.527: Maximum Structure Width in LR zones in feet~~

| Zone  | Width in feet by Category of Residential Use |                        |            |
|---|--|------------------------|------------|
|   | Cottage Housing and Rowhouse Developments    | Townhouse Developments | Apartments |
| LR1   | No limit                                     | 60                     | 45         |
| LR2   | No limit                                     | 90                     | 90         |
| LR3 outside Urban Villages, Urban Centers or Station Area Overlay Districts | No limit                                     | 120                    | 120        |
| LR3 inside Urban Villages, Urban Centers or Station Area Overlay Districts  | No limit                                     | 150                    | 150))      |

2 B. Maximum façade length in Lowrise zones. ~~((1-))~~ The maximum combined length of  
 3 all portions of façades within 15 feet of a lot line that is neither a rear lot line nor a street or  
 4 alley lot line shall not exceed 65 percent of the length of that lot line ~~((, except as specified in~~  
 5 ~~subsection 23.45.527.B.2.~~

6 ~~2. For a rowhouse development on a lot that abuts the side lot line of a lot in a~~  
 7 ~~neighborhood residential zone, the maximum combined length of all portions of façades within~~  
 8 ~~15 feet of the abutting side lot line is 40 feet)).~~

9 Section 23. Section 23.45.529 of the Seattle Municipal Code, last amended by Ordinance  
 10 127099, is amended as follows:

11 **23.45.529 Design standards**

12 A. Intent. The intent of the design standards in this Section 23.45.529 is to:

1                   1. Enhance street-facing and side facades to provide visual interest, promote  
2 new development that contributes to an attractive streetscape, and avoid the appearance of  
3 blank walls along a street or adjacent residential property;

4                   2. Foster a sense of community by integrating new pedestrian-oriented  
5 multifamily development with the neighborhood street environment and promoting designs  
6 that allow easy surveillance of the street by area residents;

7                   3. Promote livability in multifamily areas by providing a sense of openness and  
8 access to light and air; and


9                   4. Encourage the compatibility of a variety of housing types with the scale and  
10 character of neighborhoods where new multifamily development occurs.

11                B. Application of provisions. The provisions of this Section 23.45.529 apply to all  
12 residential uses that do not undergo any type of design review pursuant to Chapter 23.41 ((;  
13 ~~except single family dwelling units~~)).

14                C. Treatment of street-facing facades. For the purposes of this subsection 23.45.529.C,  
15 a street-facing facade includes all vertical surfaces enclosing interior space, including gables  
16 and dormers, as shown in Exhibit A for 23.45.529.

17 **Exhibit A for 23.45.529**

18 **Measurement of facades**

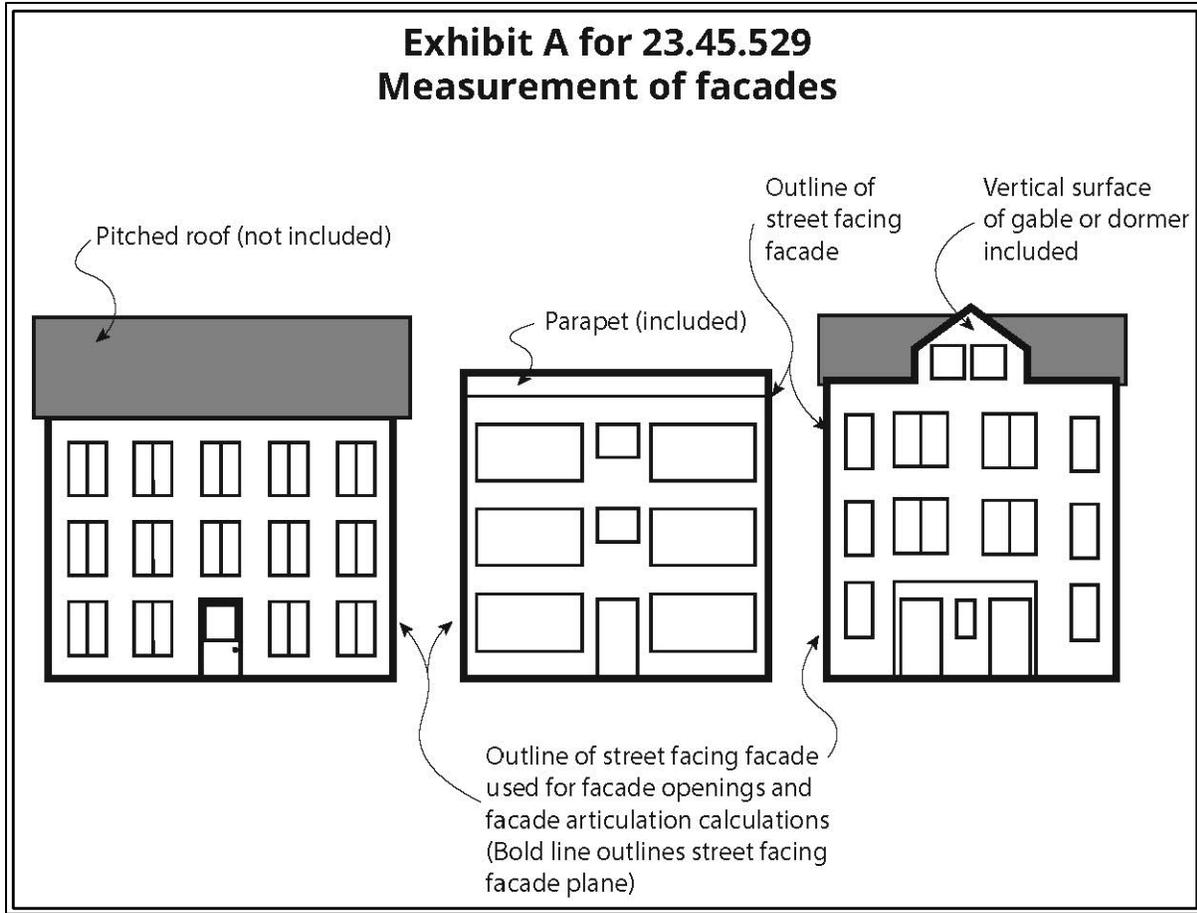

1

2        ~~((1-))~~ D. Facade openings

2

3

3                ~~((a-))~~ 1. At least 20 percent of the area of each street-facing facade shall consist  
4 of windows and/or doors, except as provided in subsection ~~((23.45.529.C.1.b))~~ 23.45.529.D.2.

4

5

5 If a front and side facade are street-facing, the two facades may be combined for the purpose of  
6 this calculation.

6

7

7                ~~((b-))~~ 2. For any rowhouse or townhouse dwelling unit that has both a front and  
8 a side facade that are street-facing, the percentage of the side street-facing facade required to  
9 consist of windows and/or doors is reduced to ten percent for the portion of the facade  
10 associated with that dwelling unit. This reduction to ten percent is not allowed if the facades

8

9

10

1 are combined for the purpose of this standard pursuant to subsection ~~((23.45.529.C.1.a))~~  
2 23.45.529.D.1 ~~((or if any of the exceptions in subsection 23.45.529.C.3 are applied)).~~

3 ~~((e.))~~ 3. Windows count toward the requirement for facade openings in this  
4 subsection ~~((23.45.529.C.1))~~ 23.45.529.D only if they are transparent. Windows composed of  
5 glass blocks or opaque glass, garage doors, and doors to utility and service areas do not count.

6 ~~((2. Facade articulation~~

7 ~~a. If a street-facing facade or portion of a street-facing facade is not~~  
8 ~~vertical, the Director shall determine whether the facade is substantially vertical and required~~  
9 ~~to comply with this subsection 23.45.529.C.~~


10 ~~b. If the street-facing facade of a structure exceeds 750 square feet in~~  
11 ~~area, division of the facade into separate facade planes is required (see Exhibit B for~~  
12 ~~23.45.529).~~

13 ~~c. In order to be considered a separate facade plane for the purposes of~~  
14 ~~this subsection 23.45.529.C.2, a portion of the street-facing facade shall have a minimum area~~  
15 ~~of 150 square feet and a maximum area of 500 square feet, and shall project or be recessed~~  
16 ~~from abutting facade planes by a minimum depth of 18 inches.~~

17 ~~d. Trim that is a minimum of 0.75 inches deep and 3.5 inches wide is~~  
18 ~~required to mark roof lines, porches, windows, and doors on all street-facing facades.~~

1 ~~Exhibit B for 23.45.529~~

2 ~~Street-facing facades~~

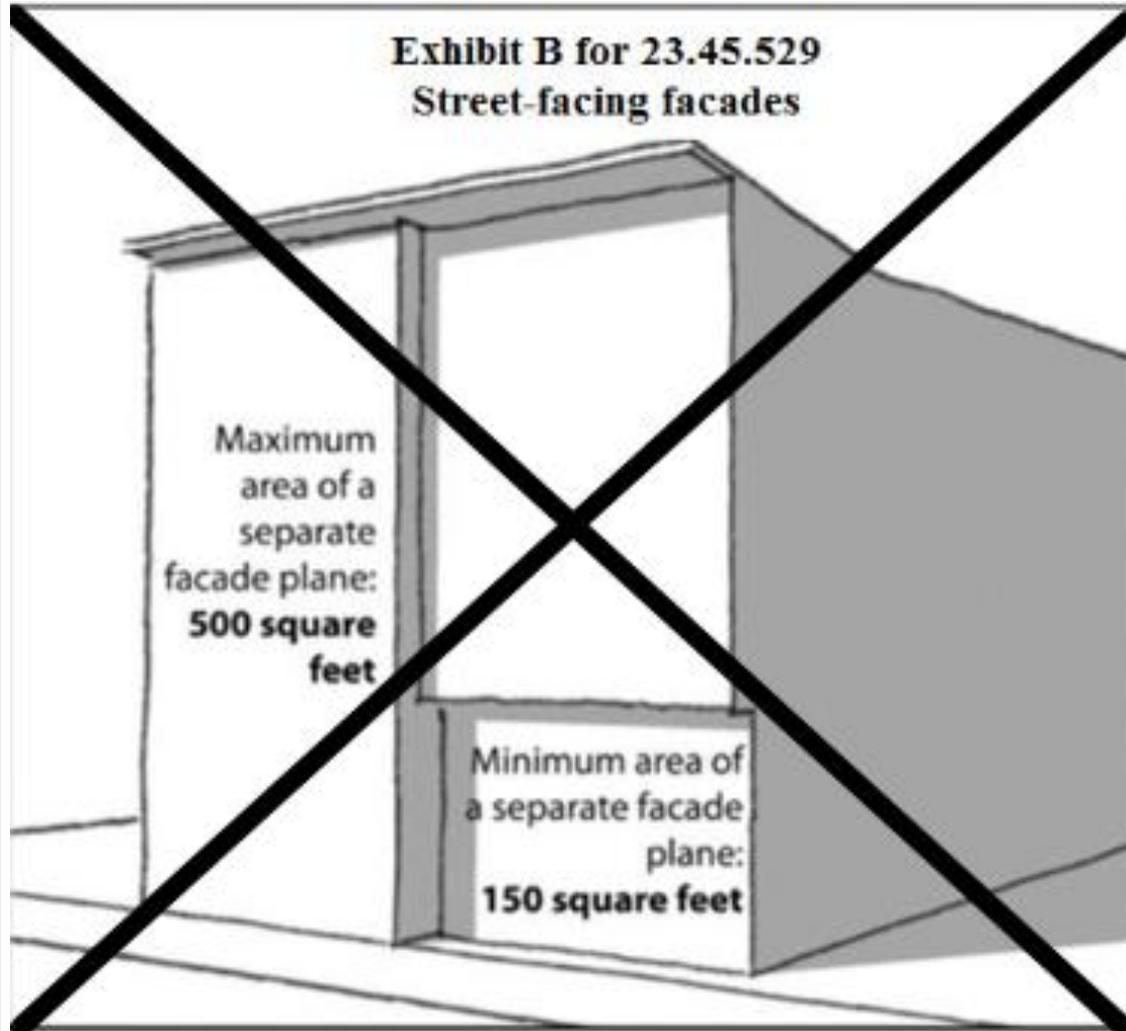

4 3. ~~The Director may allow exceptions to the facade opening requirements in~~  
5 ~~subsection 23.45.529.C.1 and the facade articulation requirements in subsection 23.45.529.C.2,~~  
6 ~~if the Director determines that the street-facing facade will meet the intent of subsection~~  
7 ~~23.45.529.A.1 for all housing types, and, as applicable, the intent of subsections 23.45.529.E.2,~~  
8 ~~23.45.529.F.3, and 23.45.529.G.4 for cottage housing developments, rowhouse developments,~~  
9 ~~and townhouse developments, respectively, through one or more of the following street-facing~~  
10 ~~facade treatments:~~

1                                   a. ~~Variations in building materials and/or color, or both, that reflect the~~  
2 ~~stacking of stories or reinforce the articulation of the facade;~~

3                                   b. ~~Incorporation of architectural features that add interest and dimension~~  
4 ~~to the facade, such as porches, bay windows, chimneys, pilasters, columns, cornices, and/or~~  
5 ~~balconies;~~

6                                   c. ~~Special landscaping elements provided to meet Green Factor~~  
7 ~~requirements pursuant to Section 23.45.524, such as trellises, that accommodate vegetated~~  
8 ~~walls covering a minimum of 25 percent of the facade surface;~~

9                                   d. ~~Special fenestration treatment, including an increase in the percentage~~  
10 ~~of windows and doors to at least 25 percent of the street-facing facade(s).))~~

11                   ((D-)) E. Treatment of side facades that are not street-facing. For the purposes of this  
12 subsection 23.45.529.D, a side facade that is not street-facing includes all vertical surfaces  
13 enclosing interior space, including gables and dormers, as shown in Exhibit A for 23.45.529, if  
14 located within 10 feet of a side lot line. ((4-)) If the side facade of a structure that is not street-  
15 facing exceeds 1,000 square feet in area, one of the following must be met:

16                                   ((a-)) 1. A portion of the side facade with a minimum area of 250 square feet and  
17 a maximum area of 750 square feet shall project or be recessed from abutting facade planes by  
18 a minimum depth of 18 inches; or

19                                   ((b-)) 2. The side facade shall include vertical or horizontal variations in  
20 building materials or color, covering a minimum of 25 percent of the facade surface.

21                                   ((2- Structures shall be designed to maintain the privacy of dwelling units by  
22 minimizing placement of proposed windows where they would directly align with windows on  
23 the side facade of a structure on an abutting lot located within 20 feet of the side property line

1 ~~or by use of fencing, screening, landscaping, or translucent windows to create privacy between~~  
2 ~~buildings.~~

3 ~~E. Design standards for cottage housing developments~~

4 ~~1. Pedestrian entry. Each cottage with a street-facing facade that is located~~  
5 ~~within 10 feet of the street lot line shall have a visually prominent pedestrian entry through the~~  
6 ~~use of covered stoops, porches, or other architectural entry features. For cottages on corner lots~~  
7 ~~that have more than one street-facing facade within 10 feet of the street lot line, a visually~~  
8 ~~prominent pedestrian entry is required on only one of the street-facing facades. Access to these~~  
9 ~~entrances may be through a required private amenity area that abuts the street.~~

10 ~~2. Architectural expression. Cottage housing developments shall include~~  
11 ~~architectural details that reduce the visual scale of the units. Each cottage shall employ one or~~  
12 ~~more of the following design techniques to reduce visual scale of the units:~~

- 13 ~~a. Attached covered porch;~~
- 14 ~~b. Roofline features such as dormers or clerestories;~~
- 15 ~~c. Bay windows;~~
- 16 ~~d. Variation in siding texture and materials; and~~
- 17 ~~e. Other appropriate architectural techniques demonstrated by the~~  
18 ~~applicant to reduce the visual scale of cottages.~~

19 ~~F. Design standards for rowhouse developments~~

20 ~~1. Pedestrian entry. Each rowhouse unit shall have a pedestrian entry on the~~  
21 ~~street-facing facade that is designed to be visually prominent through the use of covered~~  
22 ~~stoops, porches, or other architectural entry features. For rowhouse units on corner lots, a~~  
23 ~~visually prominent pedestrian entry is required on only one of the street-facing facades.~~

1                   2. ~~Front setback. Design elements to provide a transition between the street and~~  
2 ~~the rowhouse units, such as landscaping, trees, fences, or other similar features, are required in~~  
3 ~~the front setback.~~

4                   3. ~~Architectural expression. The street-facing facade of a rowhouse unit shall~~  
5 ~~provide architectural detail or composition to visually identify each individual rowhouse unit~~  
6 ~~as seen from the street. Design elements such as trim or molding, modulation, massing, color~~  
7 ~~and material variation, or other similar features may be used to achieve visual identification of~~  
8 ~~individual units. Rooftop features, such as dormers or clerestories, or roofline variation may be~~  
9 ~~used to visually identify individual rowhouse units.~~

10                   G. ~~Design standards for townhouse developments~~

11                   1. ~~Building orientation. Townhouse developments shall maximize the~~  
12 ~~orientation of individual units to the street by complying with one of the following conditions:~~

13                   a. ~~When multiple buildings are located on a lot, at least 50 percent of the~~  
14 ~~townhouse units shall be located so that there is no intervening principal structure between the~~  
15 ~~unit and the street, unless the intervening principal structure was established under permit as of~~  
16 ~~October 31, 2001, or was granted a permit on October 31, 2001, and the permit has not~~  
17 ~~expired; or~~

18                   b. ~~All townhouse units without a street-facing facade shall have direct~~  
19 ~~access to a common amenity area meeting the requirements of Section 23.45.522 that either~~  
20 ~~abuts the street or is visible and accessible from the street by a clear pedestrian pathway.~~

21                   2. ~~Pedestrian pathway. A clear pedestrian pathway from the street to the~~  
22 ~~entrance of each townhouse unit shall be provided. The pedestrian pathway may be part of a~~  
23 ~~driveway, provided that the pathway is differentiated from the driveway by pavement color,~~

1 ~~texture, or similar technique. Signage identifying townhouse unit addresses and the directions~~  
2 ~~to the unit entrance(s) from the street shall be provided.~~

3 ~~3. Pedestrian entry. Each townhouse unit with a street facing facade shall have a~~  
4 ~~pedestrian entry on the street facing facade that is designed to be a visually prominent feature~~  
5 ~~through the use of covered stoops, porches, or other architectural entry features. For townhouse~~  
6 ~~units on corner lots, a visually prominent pedestrian entry is required on only one of the street-~~  
7 ~~facing facades.~~

8 ~~4. Architectural expression. Architectural detail or composition shall be~~  
9 ~~provided to visually identify each individual townhouse unit, as seen from the public street.~~  
10 ~~Design elements such as trim or molding, modulation, massing, color and material variation, or~~  
11 ~~other similar features may be used to achieve visual identification of individual units. Rooftop~~  
12 ~~features, such as dormers or clerestories, or roofline variation may be used to visually identify~~  
13 ~~individual townhouse units.~~

14 ~~H. Building entry orientation standards for apartments~~

15 ~~1. For each apartment structure, a principal shared pedestrian entrance is~~  
16 ~~required that faces either a street or a common amenity area, such as a landscaped courtyard,~~  
17 ~~that abuts and has direct access to the street. Additional pedestrian entrances to individual units~~  
18 ~~are permitted.~~

19 ~~2. If more than one apartment structure is located on a lot, each apartment~~  
20 ~~structure separated from the street by another principal structure shall have a principal entrance~~  
21 ~~that is accessible from a common amenity area with access to the street.~~

1                   3. ~~The shared entrance of each apartment structure shall have a pedestrian entry~~  
2 ~~that is designed to be visually prominent, through the use of covered stoops, overhead weather~~  
3 ~~protection, a recessed entry, or other architectural entry features.))~~

4                   F. Pedestrian access. Each dwelling unit shall have pedestrian access at least 3 feet in  
5 width to the sidewalk or, if no sidewalk exists, the front lot line. This pedestrian access may be  
6 shared or private. This pedestrian access may cross any required setbacks or interior separation.  
7 The pedestrian access may be part of a driveway.

8                   G. Entrances. Each structure with a street-facing facade shall have a pedestrian entry on  
9 that street-facing facade meeting the following:

10                   1. For apartments, at least one pedestrian entry shall be required for the structure  
11 as a whole.

12                   2. For single-family dwelling units, cottage housing, rowhouses, and townhouses,  
13 each individual dwelling unit with a street-facing facade within 40 feet of the street lot line shall  
14 have at least one pedestrian entry on the street-facing facade.

15                   3. For structures or dwelling units on corner lots, a pedestrian entry is required  
16 on only one of the street-facing facades.

17                   4. Required pedestrian entry on street-facing facades shall have weather  
18 protection, such as a covered porch, canopy, recessed entry or similar feature, measuring at least  
19 3 feet by 3 feet in width and depth for attached and detached dwelling units and at least 6 feet in  
20 width and 4 feet in depth for stacked dwelling units.

21                   5. For attached and detached dwelling units, the pedestrian entry may be located  
22 on a wall perpendicular to the street-facing facade provided that the pedestrian entry abuts a  
23 covered porch or recessed entry that is a portion of the street-facing facade.

1 Section 24. Section 23.53.006 of the Seattle Municipal Code, last amended by Ordinance  
2 127099, is amended as follows:

3 **23.53.006 Pedestrian access and circulation**

4 \* \* \*

5 F. Exceptions. The following exceptions to pedestrian access and circulation  
6 requirements and standards apply:

7 1. Projects exempt from requirements. Pedestrian access and circulation  
8 improvements are not required for the following types of projects:

- 9 a. Change of use;
- 10 b. Alterations to existing structures;
- 11 c. Additions to existing structures that are exempt from environmental  
12 review;
- 13 d. Construction of a detached structure accessory to ~~((a single family))~~  
14 an existing dwelling unit in any zone, if the property owner enters into a no-protest agreement,  
15 as authorized by chapter 35.43 RCW, to future pedestrian access and circulation improvements  
16 and that agreement is recorded with the King County ~~((Recorder))~~ Recorder's Office;

17 e. Construction of ~~((a single family))~~ one dwelling unit on a lot in any  
18 zone, if the property owner enters into a no-protest agreement, as authorized by chapter 35.43  
19 RCW, to future pedestrian access and circulation improvements and that agreement is recorded  
20 with the King County ~~((Recorder))~~ Recorder's Office, and if at least one of the following  
21 conditions is met:

22 1) The lot is on a block front where there are no existing  
23 pedestrian access and circulation improvements within 100 feet of the lot; or

2) Construction of pedestrian access and circulation

improvements is not necessary because, for example, the existing right-of-way has suitable width and surface treatment for pedestrian use; or the existing right-of-way has a limited amount of existing and potential vehicular traffic; or the Director anticipates limited, if any, additional development near the lot because the development near the lot is at or near zoned capacity under current zoning designations;

f. Expansions of surface parking, outdoor storage, outdoor sales and outdoor display of rental equipment of less than 20 percent of the parking, storage, sales or display area, or number of parking spaces;

g. In the MML zone, the addition of:

1) Fewer than ten artist's studio dwellings;

2) Less than 750 square feet of gross floor area of major and minor vehicle repair uses and multipurpose retail sales; ~~((and))~~ or

3) Less than 4,000 square feet of gross floor area of ~~((non-residential))~~ nonresidential uses not listed in subsection 23.53.006.F.1.g.2; and

h. Construction of a new ~~((non-residential))~~ nonresidential structure of up to 4,000 square feet of gross floor area if the structure is at least 50 feet from any lot line abutting an existing street that does not have pedestrian access and circulation improvements.

2. Waiver or modification of pedestrian access and circulation requirements.

The Director, in consultation with the Director of Transportation, may waive or modify pedestrian access and circulation requirements when one or more of the following conditions are met. The waiver or modification shall provide the minimum relief necessary to accommodate site conditions while maximizing pedestrian access and circulation.

1                           a. Location in an environmentally critical area or buffer makes  
2 installation of a sidewalk, curb, and/or curb ramp structurally impracticable or technically  
3 infeasible;

4                           b. The existence of a bridge, viaduct, or structure such as a substantial  
5 retaining wall in proximity to the project site makes installation of a sidewalk, curb, and/or  
6 curb ramp structurally impracticable or technically infeasible;

7                           c. Sidewalk, curb, and/or curb ramp construction would result in  
8 undesirable disruption of existing drainage patterns, or disturbance to or removal of natural  
9 features such as significant trees or other valuable and character-defining mature vegetation; or

10                          d. Sidewalk, curb, and/or curb ramp construction would preclude  
11 vehicular access to the lot, for example on project sites where topography would render  
12 driveway access in excess of the maximum 15 percent slope.

13                          3. Notwithstanding any provision of Section 23.76.026, the applicant for a  
14 Master Use Permit or a building permit to which (~~the Land Use Code~~) Title 23 in effect prior  
15 to October 30, 2009, applies may, by written election, use the exemptions in subsections  
16 23.53.006.F.1 and 23.53.006.F.2.

17                          Section 25. Section 23.53.025 of the Seattle Municipal Code, last amended by Ordinance  
18 126682, is amended as follows:

19 **23.53.025 Access easement standards**

20 If access by easement has been approved by the Director, the easement shall meet the  
21 following standards. Surfacing of easements, pedestrian walkways required within easements,  
22 and turnaround dimensions shall meet the requirements of the Right-of-Way Improvements  
23 Manual.

1           A. Vehicle access easements serving one or two (~~(single family)~~) dwelling units (~~(or~~  
2 ~~one multifamily residential use with a maximum of two units)~~) shall meet the following  
3 standards:

- 4                   1. Easement width shall be a minimum of 10 feet.
- 5                   2. No maximum easement length shall be set. If easement length is more than  
6 150 feet, a vehicle turnaround shall be provided.
- 7                   3. (~~(Curbcut)~~) Curb cut width from the easement to the street shall be the  
8 minimum necessary for safety and access.

9           B. Vehicle access easements serving at least three but fewer than (~~(five single family)~~)  
10 ten dwelling units shall meet the following standards:

- 11                   1. Easement width shall be a minimum of 10 feet.
- 12                   2. The easement shall provide a hard-surfaced roadway at least 10 feet wide.
- 13                   3. No maximum easement length shall be set. If the easement is over 600 feet  
14 long, a fire hydrant may be required by the Director.
- 15                   4. A turnaround shall be provided unless the easement extends from street to  
16 street.
- 17                   5. (~~(Curbcut)~~) Curb cut width from the easement to the street shall be the  
18 minimum necessary for safety and access.

19           C. (~~(Vehicle access easements serving at least five but fewer than ten single family~~  
20 ~~dwelling units, or at least three but fewer than ten multifamily dwelling units~~)

- 21                   1. ~~Easement width, surfaced width, length, turn around, and curbcut width shall~~  
22 ~~be as required in subsection 23.53.025.B.~~

1                   ~~2. No single family structure shall be closer than 5 feet to the easement, except~~  
2 ~~that structural features allowed to extend into required yards under subsection 23.44.014.C.6~~  
3 ~~are also allowed to extend into the 5 foot setback from an easement.~~

4                   ~~D.)) Vehicle ((Access Easements Serving Ten))~~ access easements serving ten or more  
5 ~~((Residential Units.))~~ dwelling units shall meet the following standards:

6                   1. Easement width shall be a minimum of 32 feet;

7                   2. The easement shall provide a surfaced roadway at least 24 feet wide, except  
8 in the MPC-YT zone, where the minimum surfaced roadway width is 20 feet;

9                   3. No maximum length shall be set. If the easement is over 600 feet long, a fire  
10 hydrant may be required by the Director;

11                   4. A turnaround shall be provided unless the easement extends from street to  
12 street;

13                   5. ~~((Curbcut))~~ Curb cut width from the easement to the street shall be the  
14 minimum necessary for safety access;

15                   6. No ~~((single family structure))~~ detached dwelling unit shall be located closer  
16 than ~~((10))~~ 5 feet to an easement, except that architectural features such as cornices, eaves,  
17 gutters, roofs, fireplaces, chimneys, and other similar features shall not be located closer than 3  
18 feet to a required easement;

19                   7. One pedestrian walkway shall be provided, extending the length of the  
20 easement.

21                   ~~((E. Vehicle Access Easements Serving Nonresidential or Live work Uses.~~

22                   ~~4.))~~ D. For nonresidential or live-work uses providing fewer than ten ~~((10))~~ parking  
23 spaces, the easement shall meet the requirements of subsection ~~((E))~~ 23.53.025.B.

1           ~~((2))~~ E. For nonresidential or live-work uses providing ten ~~((10))~~ or more parking  
2 spaces, the easement shall meet the requirements of subsection ~~((D))~~ 23.53.025.C.

3           F. Pedestrian ~~((Access Easements))~~ access easements. Where a lot proposed for a  
4 residential use abuts an alley but does not abut a street and the provisions of the zone require  
5 access by vehicles from the alley, or where the alley access is an exercised option, an easement  
6 providing pedestrian access to a street from the lot shall be provided meeting the following  
7 standards:

8                   1. Easement width shall be a minimum of ~~((five-))~~ 5 ~~(( ))~~ feet;

9                   2. Easements serving one ~~((1))~~ or two ~~((2))~~ dwelling units shall provide a  
10 paved pedestrian walkway at least ~~((three-))~~ 3 ~~(( ))~~ feet wide;

11                   3. Easements serving three ~~((3))~~ or more dwelling units shall provide a paved  
12 pedestrian walkway at least ~~((five-))~~ 5 ~~(( ))~~ feet wide;

13                   4. Easements over ~~((one hundred-))~~ 100 ~~(( ))~~ feet in length shall provide  
14 lighting at intervals not to exceed ~~((fifty-))~~ 50 ~~(( ))~~ feet. Lighting placement shall not exceed  
15 ~~((fifteen-))~~ 15 ~~(( ))~~ feet in height;

16                   5. Pedestrian access easements shall not exceed ~~((two hundred-))~~ 200 ~~(( ))~~ feet  
17 in length.

18           G. Vertical ~~((Clearance Above Easements))~~ clearance above easements. When an  
19 easement serves fewer than ten ~~((10))~~ residential units and crosses a residentially zoned lot,  
20 portions of structures may be built over the easement provided that a minimum vertical  
21 clearance of ~~((sixteen and one half (16 1/2))~~ 16.5 feet is maintained above the surface of the  
22 easement roadway and a minimum turning path radius in accordance with ~~((Section 23.54.030~~  
23 €)) subsection 23.54.030.D is maintained. ~~((See))~~ Exhibit ~~((23.53.025 A))~~ A for 23.53.025.)

1           H. Exceptions (~~(From Access Easement Standards)~~) from access easement standards.

2           The Director, in consultation with the Fire Chief, may modify the requirements for easement  
3           width and surfacing for properties located in environmentally critical areas or their buffers  
4           when it is determined that:


5                        1. Such modification(s) would reduce adverse effects to identified  
6           environmentally critical areas or buffers; and

7                        2. Adequate access and provisions for fire protection can be provided for  
8           structures served by the easement.

1 **Exhibit A for 23.53.025**

2 **Residential structures permitted to be constructed over vehicle access easement**

**Exhibit 23.53.025 A  
Residential Structures Permitted to be  
Constructed Over Vehicle Access Easement**

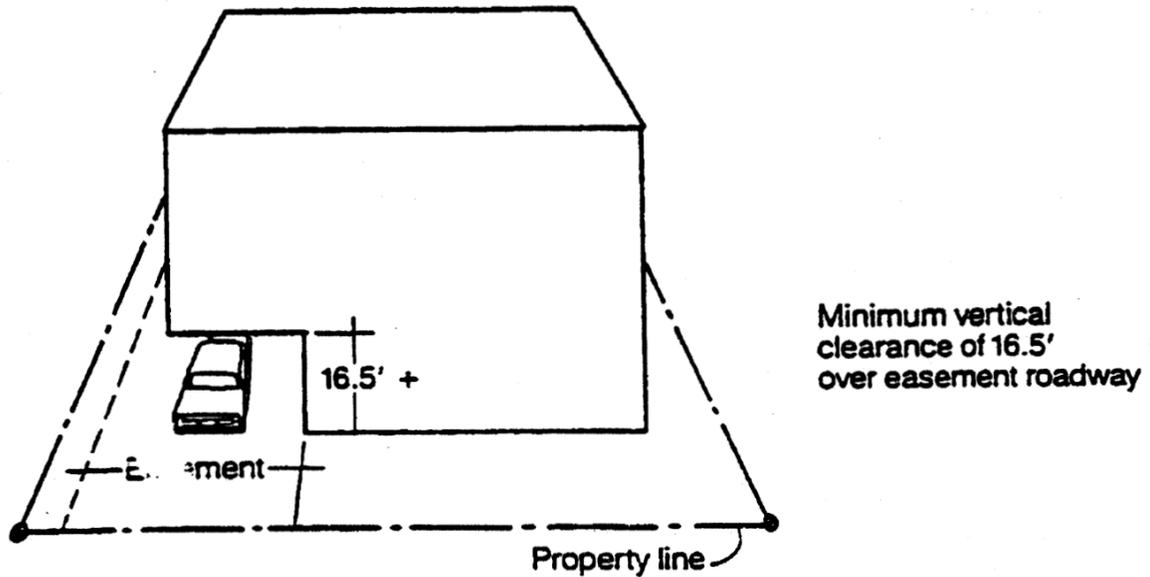

3

4

5 Section 26. Section 23.54.015 of the Seattle Municipal Code, last amended by Ordinance  
6 127099, is amended as follows:

7 **23.54.015 Required parking and maximum parking limits**

8

\* \* \*

**Table B for 23.54.015  
 Required parking for residential uses**

| Use   | Minimum parking required  |
|---|---|
| <b>I. General residential uses <sup>2</sup></b>                         |   |
| A.  | Adult family homes<br>1 space for each dwelling unit  |
| B.  | Artist's studio/dwellings<br>1 space for each dwelling units  |
| C.  | Assisted living facilities<br>1 space for each 4 assisted living units;<br>plus<br>1 space for each 2 staff members on-site at peak staffing time; plus<br>1 barrier-free passenger loading and unloading space       |
| D.  | Caretaker's quarters<br>1 space for each dwelling unit  |
| E.  | Congregate residences <sup>1</sup><br>1 space for each 4 sleeping rooms   |
| F.  | Cottage housing developments <sup>1,3,4</sup><br>1 space for each dwelling unit   |
| G.  | Floating homes<br>1 space for each dwelling unit  |
| H.  | Mobile home parks<br>1 space for each mobile home lot as defined in Chapter 22.904  |
| I.  | Multifamily residential uses( <del>(, except as otherwise provided in this Table B for 23.54.015)</del> ) <sup>1, ((2)) 3,4</sup><br>1 space per dwelling unit, or 1 space for each 2 small efficiency dwelling units |
| J.  | Nursing homes<br>1 space for each 2 staff doctors; plus 1 additional space for each 3 employees; plus 1 space for each 6 beds   |
| K.  | Single-family dwelling units <sup>1, 3,4</sup><br>1 space for each dwelling unit  |
| <b>II. Residential use requirements for specific areas <sup>2</sup></b> |   |

**Table B for 23.54.015  
 Required parking for residential uses**

| Use |   | Minimum parking required   |
|-----|---|--|
| L.  | All residential uses within urban centers or within the Station Area Overlay District <sup>(2)</sup>  | No minimum requirement   |
| M.  | All residential uses in commercial, RSL, and multifamily zones within urban villages that are not within urban center or the Station Area Overlay District, if the residential use is located within a frequent transit service area <sup>(2,4)</sup> | No minimum requirement   |
| N.  | Multifamily residential uses within the University of Washington parking impact area shown on Map A for 23.54.015 <sup>(2)</sup>  | 1 space per dwelling unit for dwelling units with fewer than 2 bedrooms; plus 1.5 spaces per dwelling units with 2 or more bedrooms; plus 0.25 spaces per bedroom for dwelling units with 3 or more bedrooms |
| O.  | Multifamily dwelling units, within the Alki area shown on Map B for 23.54.015 <sup>(2)</sup>  | 1.5 spaces for each dwelling unit  |
| P.  | Congregate residences located within one-half mile walking distance of a major transit stop <u>or a frequent transit stop</u>   | No minimum requirement   |
| Q.  | <u>Middle housing, as defined in Section 23.84A.025, located within one-half mile walking distance of a major transit stop</u>  | <u>No minimum requirement</u>  |

Footnotes to Table B for 23.54.015

<sup>1</sup> For each moderate-income unit and each low-income unit, no minimum amount of parking is required.

<sup>2</sup> The minimum amount of parking prescribed by Part I of Table B for 23.54.015 does not apply if a use, structure, or development qualifies for a greater or a lesser amount of minimum parking, including no parking, under any other provision of this Section

**Table B for 23.54.015  
 Required parking for residential uses**

| Use  | Minimum parking required |
|--|--------------------------|
| <p>23.54.015. If more than one provision in this Table B for 23.54.015 is applicable, the provision requiring the least amount of minimum parking applies(<del>(, except that if item O in Part II of Table B for 23.54.015 applies, it shall supersede any other requirement in Part I or Part II of this Table B for 23.54.015)).</del>)</p> <p><sup>3</sup> No parking is required for (<del>(single-family residential uses))</del> <u>accessory dwelling units.</u></p> <p><sup>4</sup> <u>No parking is required for principal dwelling units</u> on lots in any residential zone that are less than 3,000 square feet in size or less than 30 feet in width where access to parking is permitted through a required yard or setback abutting a street according to the standards of subsections 23.44.016.B.2, 23.45.536.C.2, or 23.45.536.C.3.</p> <p>(<del>(<sup>4</sup>Except as provided in Footnote 4, the minimum amounts of parking prescribed by Part 1 of Table B for 23.54.015 apply within 1,320 feet of the Fauntleroy Ferry Terminal.))</del>)</p> |                          |

\* \* \*

**Table D for 23.54.015  
 Parking for bicycles <sup>1</sup>**

| <del>(USE)</del> <u>Use</u> | Bike parking requirements |            |
|-----------------------------|---------------------------|------------|
|                             | Long-term                 | Short-term |

\* \* \*

**D. RESIDENTIAL USES <sup>3</sup>**

|     |  |                        |   |
|-----|--|------------------------|---|
| D.1 | Congregate residences <sup>4, 5, 6</sup>   | 1 per 4 sleeping rooms | 1 per 80 sleeping rooms. 2 spaces minimum |
| D.2 | Multifamily structures other than townhouse and rowhouse developments <sup>4, 5, 6</sup> | 1 per dwelling unit    | 1 per 20 dwelling units                   |
| D.3 | Single-family residences   | None                   | None                                      |
| D.4 | Townhouse and rowhouse developments <sup>5, 6</sup>                                      | 1 per dwelling unit    | None                                      |

1

**Table D for 23.54.015  
 Parking for bicycles <sup>1</sup>**

| <b>((USE)) Use</b>                  |  | <b>Bike parking requirements</b>  |   |
|-------------------------------------|--|---|---|
|                                     |  | <b>Long-term</b>  | <b>Short-term</b>   |
| <b>E. TRANSPORTATION FACILITIES</b> |  |   |   |
| E.1((-))                            | Park and ride facilities on surface parking lots                   | At least 20 <sup>((6)) 7</sup>  | At least 10   |
| E.2((-))                            | Park and ride facilities in parking garages                        | At least 20 if parking is the principal use of a property; zero if non-parking uses are the principal use of a property | At least 10 if parking is the principal use of a property; zero if non-parking uses are the principal use of a property |
| E.3((-))                            | Flexible-use parking garages and flexible-use parking surface lots | 1 per 20 auto spaces  | None  |
| E.4((-))                            | Rail transit facilities and passenger terminals                    | Spaces for 5 percent of projected AM peak period daily ridership <sup>((6)) 7</sup>                                     | Spaces for 2 percent of projected AM peak period daily ridership  |

Footnotes to Table D for 23.54.015

<sup>1</sup> Required bicycle parking includes long-term and short-term amounts shown in this Table D for 23.54.015.

<sup>2</sup> The Director may reduce short-term bicycle parking requirements for theaters and spectator sport facilities that provide bicycle valet services authorized through a Transportation Management Program. A bicycle valet service is a service that allows bicycles to be temporarily stored in a secure area, such as a monitored bicycle corral.

<sup>3</sup> For residential uses, after the first 50 spaces for bicycles are provided, additional spaces are required at three-quarters the ratio shown in this Table D for 23.54.015.

<sup>4</sup> For congregate residences or multifamily structures that are owned and operated by a not-for-profit entity serving seniors or persons with disabilities, or that are licensed by the State and provide supportive services for seniors or persons with disabilities, as a Type I decision, the Director shall have the discretion to reduce the amount of required bicycle parking to as few as zero if it can be demonstrated that residents are less likely to travel by bicycle.

**Table D for 23.54.015  
 Parking for bicycles <sup>1</sup>**

|                    |                                  |                   |
|--------------------|----------------------------------|-------------------|
| <b>((USE)) Use</b> | <b>Bike parking requirements</b> |                   |
|                    | <b>Long-term</b>                 | <b>Short-term</b> |

<sup>5</sup> In low-income housing, there is no minimum required long-term bicycle parking requirement for each unit subject to affordability limits no higher than 30 percent of median income and long-term bicycle parking requirements may be waived by the Director as a Type I decision for each unit subject to affordability limits greater than 30 percent of median income and no higher than 80 percent of median income if a reasonable alternative is provided (e.g., in-unit vertical bike storage).

<sup>6</sup> No bike parking is required for middle housing as defined in Section 23.84A.025.

~~((6))~~<sup>7</sup> The Director, in consultation with the Director of Transportation, may require more bicycle parking spaces based on the following factors: area topography; pattern and volume of expected bicycle users; nearby residential and employment density; proximity to the Urban Trails system and other existing and planned bicycle facilities; projected transit ridership and expected access to transit by bicycle; and other relevant transportation and land use information.

1  
 2 Section 27. Section 23.54.020 of the Seattle Municipal Code, last amended by Ordinance  
 3 126509, is amended as follows:

4 **23.54.020 Parking quantity exceptions**

5 The motor vehicle parking quantity exceptions set forth in this Section 23.54.020 apply in all  
 6 zones except downtown zones, which are regulated by Section 23.49.019, and Major  
 7 Institution zones, which are regulated by Section 23.54.016.

8 A. Adding ~~((Units))~~ units to ~~((Existing Structures))~~ existing structures in Multifamily  
 9 and Commercial ~~((Zones.))~~ zones

10 1. For the purposes of this Section 23.54.020, "existing structures" means those  
 11 structures that were established under permit, or for which a permit has been granted and has  
 12 not expired as of the applicable date, as follows:

13 a. In multifamily zones, August 10, 1982;

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21

b. In commercial zones, June 9, 1986.

2. In locations in a multifamily or commercial zone where there is a minimum parking requirement, one dwelling unit may either be added to an existing structure or may be built on a lot that contains an existing structure without additional parking if both of the following requirements are met:

a. Either the existing parking provided on the lot meets development standards, or the lot area is not increased and existing parking is screened and landscaped to the greatest extent practical; and

b. Any additional parking shall meet all development standards for the zone.

3. In locations in a multifamily or commercial zone where there is a minimum parking requirement, the Director may authorize a reduction or waiver of the parking requirement as a Type I decision when dwelling units are proposed to be added either to an existing structure or on a lot that contains an existing structure, in addition to the exception permitted in subsection 23.54.020.A.2, if the conditions in subsections 23.54.020.A.3.a and b below are met, and either of the conditions in subsections 23.54.020.A.3.c or d below are met:

a. The only use of the structure will be residential; and

b. The lot is not located in either the University District Parking Overlay Area (Map A for 23.54.015) or the Alki Area Parking Overlay (Map B for 23.54.015); and

c. The topography of the lot or location of existing structures makes provision of an off-street parking space physically infeasible in a conforming location; or



1                   2. "Medium vehicle" means the minimum size of a medium vehicle parking  
2 space shall be 8 feet in width and 16 feet in length.

3                   3. "Small vehicle" means the minimum size of a small vehicle parking space  
4 shall be 7.5 feet in width and 15 feet in length.

5                   4. "Barrier-free parking" means a parking space meeting the following  
6 standards:

7                   a. Parking spaces shall not be less than 8 feet in width and shall have an  
8 adjacent access aisle not less than 5 feet in width. Van-accessible parking spaces shall have an  
9 adjacent access aisle not less than 8 feet in width. Where two adjacent spaces are provided, the  
10 access aisle may be shared between the two spaces. Boundaries of access aisles shall be  
11 marked so that aisles will not be used as parking space.

12                   b. A minimum length of 19 feet or when more than one barrier-free  
13 parking space is provided, at least one shall have a minimum length of 19 feet, and other  
14 spaces may be the lengths of small, medium, or large spaces in approximate proportion to the  
15 number of each size space provided on the lot.

16                   5. "Tandem parking" means a parking space equal to the width and two times  
17 the length of the vehicle size standards in subsections 23.54.030.A.1, 23.54.030.A.2, and  
18 23.54.030.A.3 for the size of the vehicle to be accommodated.


19                   6. No wall, post, guardrail, or other obstruction, or lot line, is permitted within  
20 the area for car door opening. Columns or other structural elements may encroach into the  
21 parking space a maximum of 6 inches on a side, except in the area for car door opening 5 feet  
22 from the longitudinal centerline, or 4 feet from the transverse centerline of a parking space (see  
23 Exhibit A for 23.54.030).

1 7. If the parking space is next to a lot line and the parking space is parallel to the  
2 lot line, the minimum width of the space is 9 feet.


3 **Exhibit A for 23.54.030**

4 **Encroachments ((~~Into Required Parking Space~~)) into required parking**

5

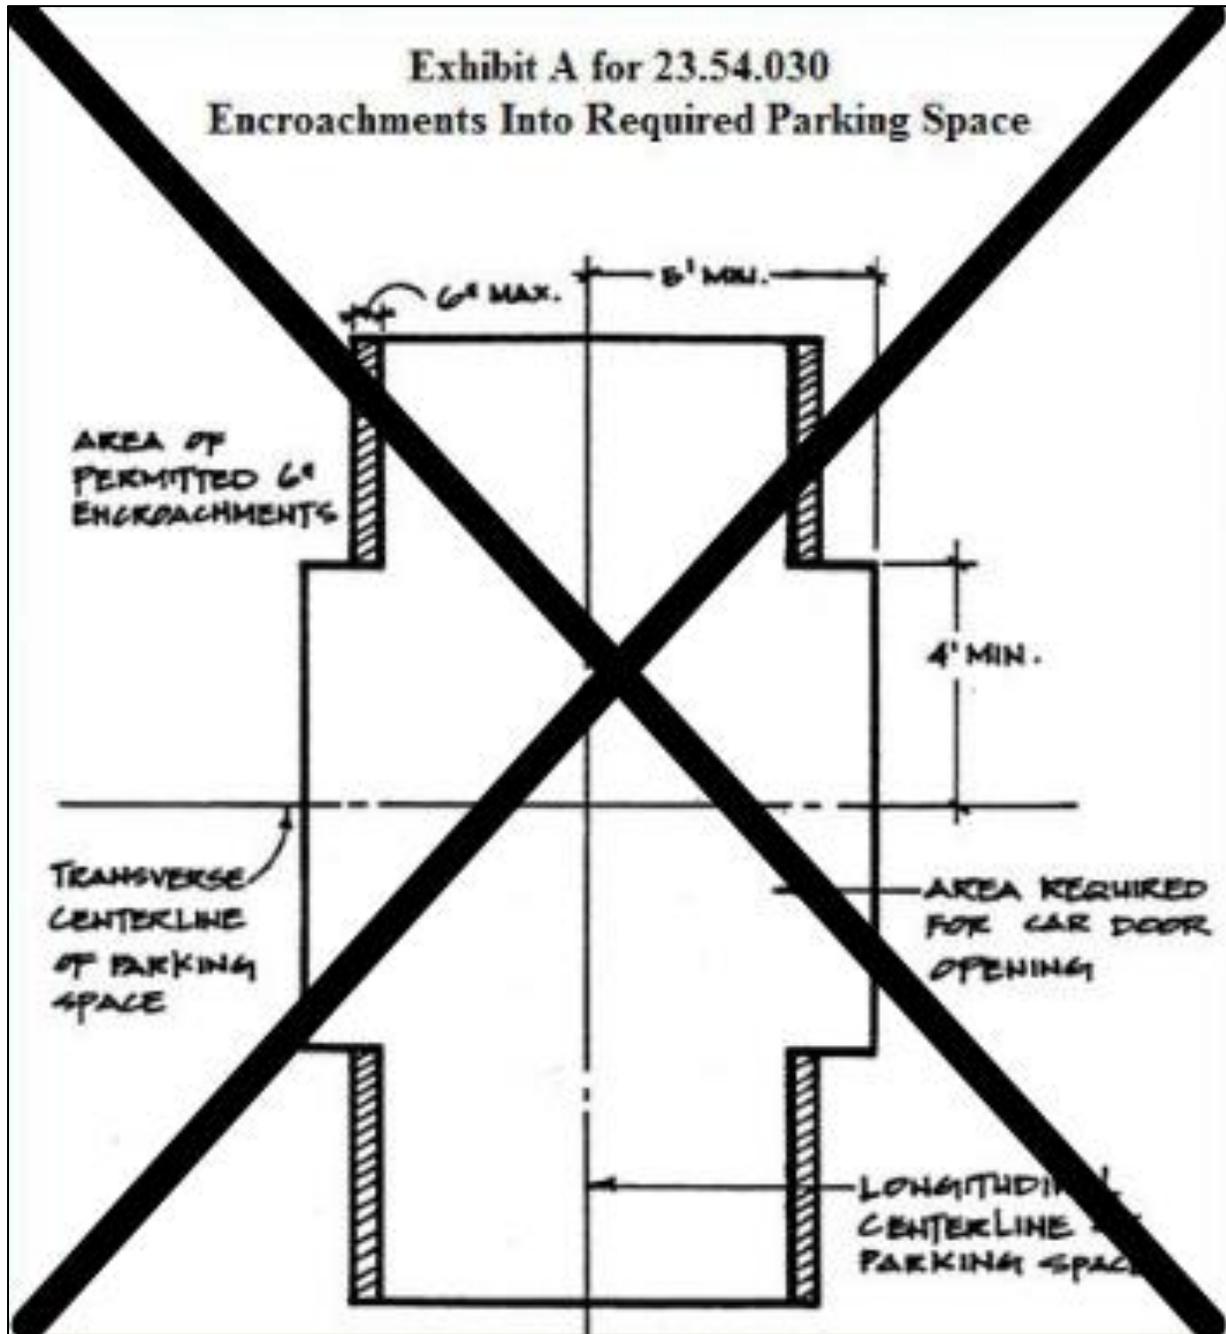

### Exhibit A for 23.54.030 Encroachments into required parking

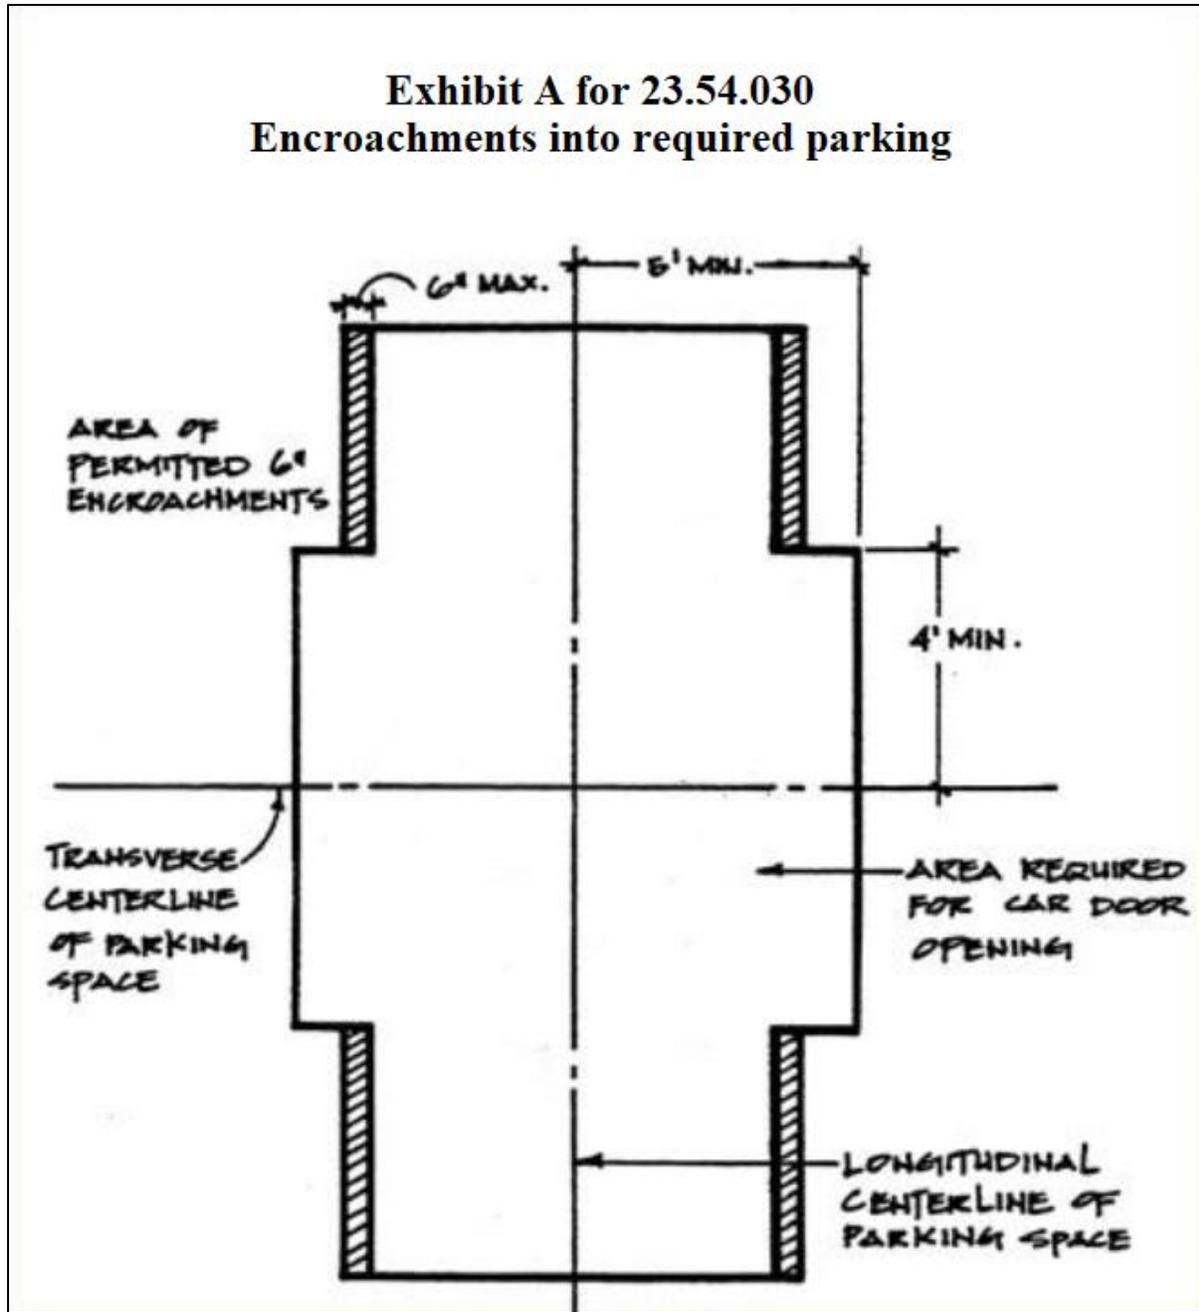

1  
2 B. Parking space requirements. The required size of parking spaces shall be determined  
3 by whether the parking is for a residential, live-work, or ((non residential)) nonresidential use.  
4 In structures containing residential uses and also containing either ((non residential))  
5 nonresidential uses or live-work units, parking that is clearly set aside and reserved for  
6 residential or live-work use shall meet the standards of subsection 23.54.030.B.1. Parking for

1 all other uses within the structure shall meet the standards of subsection 23.54.030.B.2. All  
2 uses shall provide barrier-free accessible parking if required by the Seattle Building Code or  
3 the Seattle Residential Code.

4 1. Residential uses

5 a. When five or fewer parking spaces are provided, the minimum  
6 required size of a parking space shall be for a medium vehicle, as described in subsection  
7 23.54.030.A.2, except as provided in subsection 23.54.030.B.1.d.

8 b. When more than five parking spaces are provided, a minimum of 60  
9 percent of the parking spaces shall be striped for medium vehicles. The minimum size for a  
10 medium parking space shall also be the maximum size. Forty percent of the parking spaces  
11 may be striped for any size category in subsection 23.54.030.A, provided that when parking  
12 spaces are striped for large vehicles, the minimum required aisle width shall be as shown for  
13 medium vehicles.

14 c. Assisted living facilities. Parking spaces shall be provided as in  
15 subsections 23.54.030.B.1.a and 23.54.030.B.1.b, except that a minimum of two spaces shall  
16 be striped for a large vehicle.

17 d. ~~((Townhouse units.))~~ For an individual garage serving ~~((a townhouse))~~  
18 an individual dwelling unit, the minimum required size of a parking space shall be for a  
19 medium vehicle, as described in subsection 23.54.030.A.

20 2. ~~((Non-residential))~~ Nonresidential uses

21 a. When ten or fewer parking spaces are provided, a maximum of 25  
22 percent of the parking spaces may be striped for small vehicles. A minimum of 75 percent of  
23 the spaces shall be striped for large vehicles.

1                                   b. When between 11 and 19 parking spaces are provided, a minimum of  
2 25 percent of the parking spaces shall be striped for small vehicles. The minimum required size  
3 for these small parking spaces shall also be the maximum size. A maximum of 65 percent of  
4 the parking spaces may be striped for small vehicles. A minimum of 35 percent of the spaces  
5 shall be striped for large vehicles.

6                                   c. When 20 or more parking spaces are provided, a minimum of 35  
7 percent of the parking spaces shall be striped for small vehicles. The minimum required size  
8 for small parking spaces shall also be the maximum size. A maximum of 65 percent of the  
9 parking spaces may be striped for small vehicles. A minimum of 35 percent of the spaces shall  
10 be striped for large vehicles.

11                                  d. The minimum vehicle clearance shall be at least 6 feet 9 inches on at  
12 least one floor, and there shall be at least one direct entrance that is at least 6 feet 9 inches in  
13 height for all parking garages accessory to ~~((non-residential))~~ nonresidential uses and live-  
14 work units and for all flexible-use parking garages.

15                                  3. Live-work uses. The first required parking space shall meet the parking  
16 standards for residential use. Additional required parking for a live-work use shall meet the  
17 parking standards for ~~((non-residential))~~ nonresidential use.

18                                  C. Backing ~~((Distances))~~ distances and ~~((Moving Other Vehicles.))~~ moving other  
19 vehicles

20                                  1. Adequate ingress to and egress from all parking spaces shall be provided  
21 without having to move another vehicle, except in the case of multiple spaces provided for ~~((a~~  
22 ~~single-family))~~ one dwelling unit ~~((or an accessory dwelling unit associated with a single-~~

1 ~~family dwelling,~~) or in the case of tandem parking authorized under (~~(Section)~~) subsection  
2 23.54.020.B.

3 2. Except for lots with fewer than three parking spaces, ingress to and egress  
4 from all parking spaces shall be provided without requiring backing more than 50 feet.

5 D. Driveways. Driveway requirements for residential and nonresidential uses are  
6 described below. When a driveway is used for both residential and nonresidential parking, it  
7 shall meet the standards for nonresidential uses described in subsection 23.54.030.D.2.

8 1. Residential uses(~~(-)~~)

9 a. Driveway width. Driveways less than 100 feet in length that serve 30  
10 or fewer parking spaces shall be a minimum of 10 feet in width for one-way or two-way traffic.

11 b. Except for driveways serving one (~~(single-family)~~) dwelling unit,  
12 driveways more than 100 feet in length that serve 30 or fewer parking spaces shall either:


13 1) (~~(be)~~) Be a minimum of 16 feet wide, tapered over a 20 foot  
14 distance to a 10 foot opening at the lot line; or

15 2) (~~(be)~~) Be a minimum of 10 feet wide and provide a passing  
16 area at least 20 feet wide and 20 feet long. The passing area shall begin 20 feet from the lot  
17 line, with an appropriate taper to meet the 10-foot opening at the lot line. If a taper is provided  
18 at the other end of the passing area, it shall have a minimum length of 20 feet.

19 c. Driveways of any length that serve more than 30 parking spaces shall  
20 be at least 10 feet wide for one-way traffic and at least 20 feet wide for two-way traffic.

21 d. Driveways for two attached (~~(rowhouse or townhouse)~~) dwelling units  
22 may be paired so that there is a single curb cut providing access. The maximum width of the  
23 paired driveway is 18 feet.


- 1 e. Driveways with a turning radius of more than 35 degrees shall
- 2 conform to the minimum turning path radius shown in Exhibit B for 23.54.030.

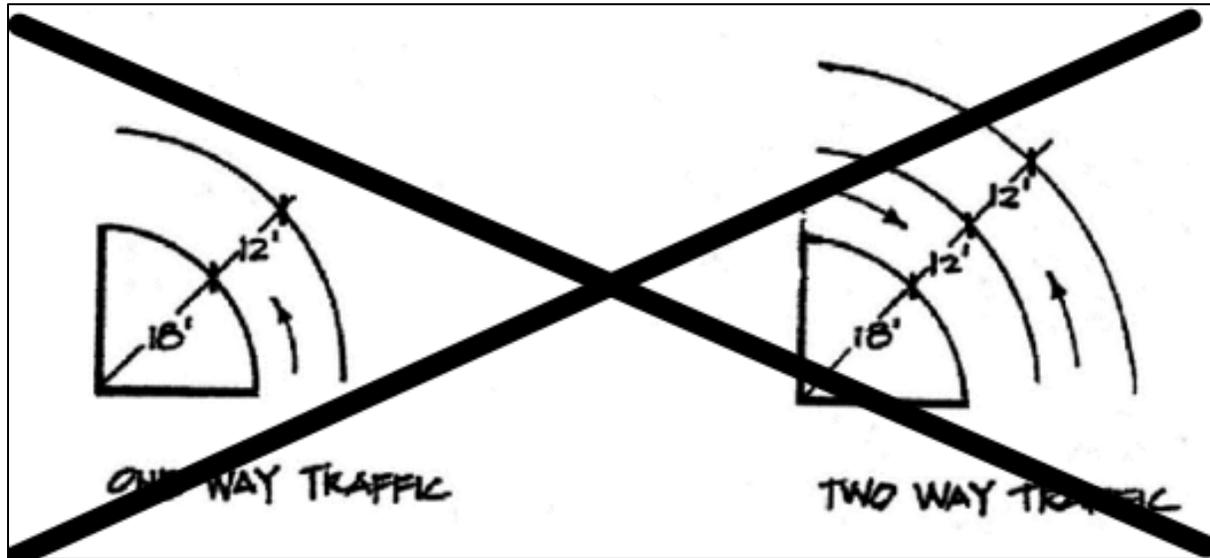

- 3
- 4 ((Exhibit B for 23.54.030: Turning Path Radius))

1 **Exhibit B for 23.54.030**

2 **Turning path radius**

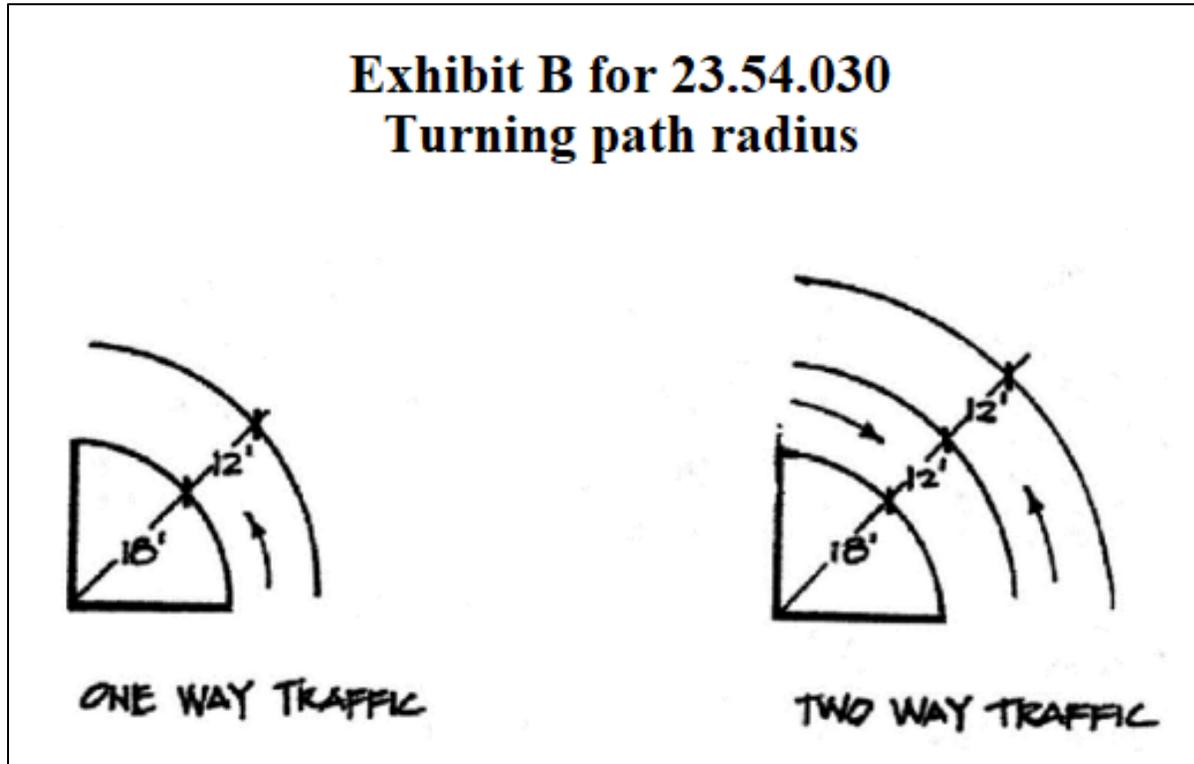

3

4

f. Vehicles may back onto a street from a parking area serving five or

5

fewer vehicles, provided that either:

6

1) The street is not an arterial as defined in Section 11.18.010; or

7

2) For lot with one ((~~single family~~)) dwelling unit or one

8

parking space, the Director may permit backing onto an arterial based on a safety analysis that addresses visibility, traffic volume, and other relevant issues.

9

10

g. Nonconforming driveways. The number of parking spaces served by

11

an existing driveway that does not meet the standards of this subsection 23.54.030.D.1 shall

12

not be increased. This prohibition may be waived by the Director after consulting with the

13

Director of the Seattle Department of Transportation, based on a safety analysis.

14

2. Nonresidential ((~~Uses~~)) uses

1 a. Driveway (~~(Widths.)~~) widths

2 1) The minimum width of driveways for (~~(one-way))~~ one-way  
3 traffic shall be 12 feet and the maximum width shall be 15 feet.

4 2) The minimum width of driveways for (~~(two-way))~~ two-way  
5 traffic shall be 22 feet and the maximum width shall be 25 feet.

6 b. Driveways shall conform to the minimum turning path radius shown  
7 in Exhibit B for 23.54.030.

8 c. For driveways that provide access to a solid waste management use  
9 the Director may allow both a maximum driveway width greater than the limits set in  
10 subsection 23.54.030.D.2.a and appropriate turning path radii, as determined necessary for  
11 truck maneuvering.

12 3. Driveway slope for all uses. No portion of a driveway, whether located on a  
13 lot or on a right-of-way, shall exceed a slope of 15 percent, except as provided in this  
14 subsection 23.54.030.D.3. The maximum 15 percent slope shall apply in relation to both the  
15 current grade of the right-of-way to which the driveway connects, and to the proposed finished  
16 grade of the right-of-way if it is different from the current grade. The ends of a driveway shall  
17 be adjusted to accommodate an appropriate crest and sag. The Director may permit a driveway  
18 slope of more than 15 percent if it is found that:

19 a. The topography or other special characteristic of the lot makes a 15  
20 percent maximum driveway slope infeasible;

21 b. The additional amount of slope permitted is the least amount  
22 necessary to accommodate the conditions of the lot; and

23 c. The driveway is still useable as access to the lot.

E. Parking aisles

1. Parking aisles shall be provided according to the requirements of Table A for 23.54.030 and Exhibit C for 23.54.030.

**Table A for 23.54.030**  
**Parking aisle dimensions**

| <u>Parking angle</u> | <u>Stall width</u> | <u>Stall length (in feet)</u> | <u>Aisle width (in feet)<sup>1</sup></u> | <u>Curb depth per car (in feet)</u> | <u>Unit width (in feet)<sup>2</sup></u> | <u>Curb length per car (in feet)</u> |
|----------------------|--------------------|-------------------------------|--|-------------------------------------|---|--------------------------------------|
| 0°                   | <u>Small</u>       | <u>18</u>                     | <u>10</u>                                | <u>7.5</u>                          | <u>25</u>                               | <u>18</u>                            |
|                      | <u>Medium</u>      | <u>20</u>                     | <u>10</u>                                | <u>8</u>                            | <u>26</u>                               | <u>20</u>                            |
|                      | <u>Large</u>       | <u>24</u>                     | <u>12</u>                                | <u>8</u>                            | <u>28</u>                               | <u>24</u>                            |
| 45°                  | <u>Small</u>       | <u>15</u>                     | <u>11</u>                                | <u>15.91</u>                        | <u>42.82</u>                            | <u>10.61</u>                         |
|                      | <u>Medium</u>      | <u>16</u>                     | <u>13</u>                                | <u>16.97</u>                        | <u>46.94</u>                            | <u>11.3</u>                          |
|                      | <u>Large</u>       | <u>19</u>                     | <u>13</u>                                | <u>19.09</u>                        | <u>51.18</u>                            | <u>11.3</u>                          |
| 60°                  | <u>Small</u>       | <u>15</u>                     | <u>13</u>                                | <u>16.74</u>                        | <u>46.48</u>                            | <u>8.66</u>                          |
|                      | <u>Medium</u>      | <u>16</u>                     | <u>15</u>                                | <u>17.86</u>                        | <u>50.72</u>                            | <u>9.24</u>                          |
|                      | <u>Large</u>       | <u>19</u>                     | <u>17.5</u>                              | <u>20.45</u>                        | <u>58.41</u>                            | <u>9.24</u>                          |
| 75°                  | <u>Small</u>       | <u>15</u>                     | <u>16.5</u>                              | <u>16.43</u>                        | <u>49.36</u>                            | <u>7.76</u>                          |
|                      | <u>Medium</u>      | <u>16</u>                     | <u>18.5</u>                              | <u>17.52</u>                        | <u>53.55</u>                            | <u>8.25</u>                          |
|                      | <u>Large</u>       | <u>19</u>                     | <u>20</u>                                | <u>20.42</u>                        | <u>60.84<sup>2</sup></u>                | <u>8.25</u>                          |
| 90°                  | <u>Small</u>       | <u>15</u>                     | <u>20</u>                                | <u>15</u>                           | <u>50</u>                               | <u>7.5</u>                           |
|                      | <u>Medium</u>      | <u>16</u>                     | <u>22</u>                                | <u>16</u>                           | <u>54</u>                               | <u>8</u>                             |
|                      | <u>Large</u>       | <u>19</u>                     | <u>24<sup>3</sup></u>                    | <u>19</u>                           | <u>62<sup>2</sup></u>                   | <u>8</u>                             |

Footnotes for Table A for 23.54.030

<sup>1</sup> Required aisle width is for one-way traffic only. If two-way traffic is proposed, then the minimum aisle width shall be 20 feet or greater.

<sup>2</sup> 60 feet may be substituted for required unit width on lots where the available width is in 60-foot whole multiples, provided that the minimum width of the parking stalls shall be 9 feet.

<sup>3</sup> For lots 44 feet in width or less, the Director may reduce the aisle width to as low as 20 feet if large parking spaces are provided at 90 degrees as long as the spaces are 9 feet wide.

| A<br>Parking<br>Angle | B<br>Stall<br>Width | C<br>Stall<br>Length | D<br>Aisle<br>Width <sup>1</sup> | E<br>Curb<br>Depth<br>Per Car | F<br>Unit<br>Width <sup>3</sup> | G<br>Curb<br>Length<br>Per Car |
|-----------------------|---------------------|----------------------|----------------------------------|-------------------------------|---------------------------------|--------------------------------|
| 0°                    | 7.5                 | 18.0                 | 10.0                             | 7.5                           | 25.0                            | 18.0                           |
|                       | 8.0                 | 20.0                 | 10.0                             | 8.0                           | 26.0                            | 20.0                           |
|                       | 8.5                 | 24.0                 | 12.0                             | 8.5                           | 29.0                            | 24.0                           |
| 45°                   | 7.5                 | 15.0                 | 11.0                             | 15.91                         | 42.82                           | 10.61                          |
|                       | 8.0                 | 16.0                 | 13.0                             | 16.97                         | 46.90                           | 11.3                           |
|                       | 8.5                 | 19.0                 | 13.0                             | 19.44                         | 51.88                           | 12.02                          |
| 60°                   | 7.5                 | 15.0                 | 13.0                             | 16.74                         | 46.48                           | 8.66                           |
|                       | 8.0                 | 16.0                 | 15.0                             | 17.86                         | 50.72                           | 9.24                           |
|                       | 8.5                 | 19.0                 | 17.5                             | 20.70                         | 57.90                           | 9.82                           |
| 75°                   | 7.5                 | 15.0                 | 16.5                             | 16.43                         | 49.35                           | 7.76                           |
|                       | 8.0                 | 16.0                 | 18.5                             | 17.52                         | 53.54                           | 8.25                           |
|                       | 8.5                 | 19.0                 | 20.0                             | 20.55                         | 61.10 <sup>3</sup>              | 8.80                           |
| 90°                   | 7.5                 | 15.0                 | 20.0                             | 15.0                          | 50.0                            | 7.5                            |
|                       | 8.0                 | 16.0                 | 22.0                             | 16.0                          | 54.0                            | 8.0                            |
|                       | 8.5                 | 19.0 <sup>2</sup>    | 24.0 <sup>2</sup>                | 19.0                          | 62.0 <sup>3</sup>               | 8.5                            |

<sup>1</sup> Required aisle width is for one-way traffic only. If two-way traffic is proposed, then the minimum aisle width shall be 20 feet or greater.

<sup>2</sup> When lot width is less than 43 feet, 40 feet may be substituted for a two-way aisle and a single row of cars at 90° to the aisle, provided that the minimum width of the parking stalls shall be 9½ feet.

<sup>3</sup> 60 feet may be substituted for required unit width on lots where the available width is in 60-foot whole multiples, provided that the minimum width of the parking stalls shall be 9½ feet.

The following equations may be used to compute dimensions for parking angles other than those provided in the chart above:

$$E = C \sin A + B \cos A$$

$$G = B / \sin A$$

NOTE: Aisle widths shall be provided as required for the next greater parking angle shown in the chart above.


1

2 ((Exhibit C for 23.54.030: Parking Aisle Dimensions))

1 **Exhibit C for 23.54.030**

2 **Parking aisle dimension measurement**

**Exhibit C for 23.54.030**  
**Parking aisle dimension measurement**

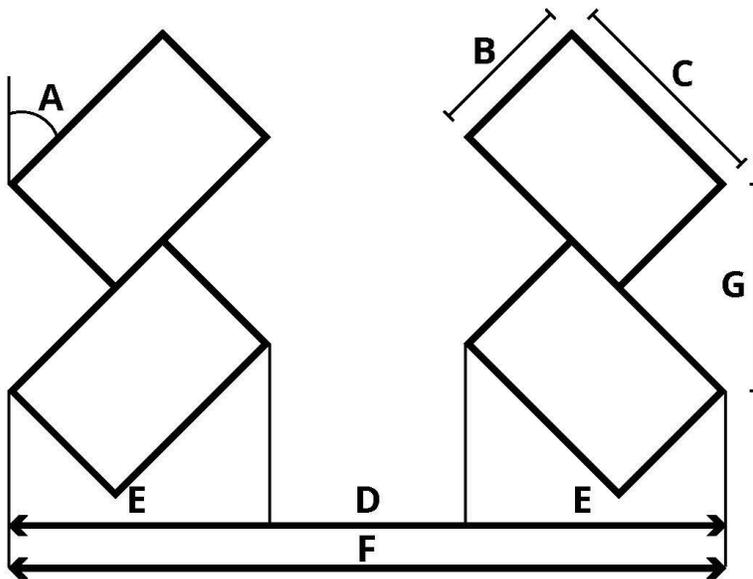

The following equations may be used to compute dimensions for parking angles other than those provided in the chart above.

$$E = C \sin A + B \cos A$$

$$G = B / \sin A$$

Note: Aisle widths shall be provided as required for the next greater parking angle shown in the chart above.

3

4 2. Minimum aisle widths shall be provided for the largest vehicles served by the  
5 aisle.

6 3. Turning and maneuvering areas shall be located on private property, except  
7 that alleys may be credited as aisle space.

8 4. Aisle slope shall not exceed 17 percent provided that the Director may permit  
9 a greater slope if the criteria in subsections 23.54.030.D.3.a, 23.54.030.D.3.b, and  
10 23.54.030.D.3.c are met.

11

\* \* \*

1 L. Electric vehicle (EV) charging infrastructure. New parking spaces provided on a lot  
2 when a new building is constructed shall be "EV-ready" as specified in this subsection  
3 23.54.030.L. The required number of EV-ready parking spaces shall be determined by whether  
4 the parking is for a residential or nonresidential use. Parking that is clearly set aside and  
5 reserved for residential use shall meet the standards of subsection 23.54.030.L.1; parking for  
6 all other uses within the structure shall meet the standards of subsection 23.54.030.L.2.

7 1. Residential uses

8 a. Private parking for individual residential units. When parking for any  
9 individual dwelling unit is provided in a private garage, carport, or parking area, separate from  
10 any parking facilities serving other units, at least one parking space for each unit in that garage,  
11 carport, or surface parking area shall be EV-ready.

12 b. Surface parking for multiple ~~((residences))~~ dwelling units. When  
13 parking for ~~((multifamily residential uses))~~ multiple dwelling units is provided in a surface  
14 parking area serving multiple ~~((residences))~~ dwelling units, the number of parking spaces that  
15 shall be EV-ready shall be as follows:

16 ~~((1) When between one and six parking spaces are provided, each  
17 of those parking spaces shall be EV-ready;~~

18 ~~2) When between seven and 25 parking spaces are provided, a  
19 minimum of six of those parking spaces shall be EV-ready; and~~

20 ~~3) When more than 25 parking spaces are provided, a minimum  
21 of 20 percent of those parking spaces shall be EV-ready.)~~

22 1) When up to 25 parking spaces are provided, the first 12  
23 parking spaces shall be EV-ready; and



1 c) Community farm;

2 d) Library;

3 e) Museum;

4 f) Private club;

5 g) Religious facility; and

6 h) School, elementary or secondary;

7 2) Entertainment uses;

8 3) Eating and drinking establishments;

9 4) Automotive sales and services;

10 5) Multipurpose retail sales;

11 6) Heavy sales and services, except heavy commercial services;

12 and

13 7) Marine sales and services.

14 3. Rounding. When calculating the number of required EV-ready parking  
15 spaces, any fraction or portion of an EV-ready parking space required shall be rounded up to  
16 the nearest whole number.

17 4. Reductions

18 a. The Director may, in consultation with the Director of Seattle City  
19 Light, reduce the requirements of this subsection 23.54.030.L as a Type I decision (~~where~~) if  
20 there is substantial evidence (~~substantiating~~) that the added electrical load that can be  
21 attributed to meeting the requirements will:

22 1) Alter the local utility infrastructure design requirements on the  
23 utility side of the legal point of service, so as to require on-property power transformation; or



1 maximum number of parking spaces allowed, as set forth in Section 23.54.015 or elsewhere in  
2 this Title 23.

3 8. This Section 23.54.030 does not require EV supply equipment, as defined by  
4 Article 100 of the Seattle Electrical Code, to be installed.

5 Section 29. Section 23.84A.010 of the Seattle Municipal Code, last amended by  
6 Ordinance 126685, is amended as follows:

7 **23.84A.010 “E”**

8 \* \* \*

9 "Essential public facilities" within the City of Seattle means airports, sewage treatment  
10 plants, jails, light rail transit systems, and power plants.

11 “EV-ready” means a minimum 40-ampere dedicated 208- or 240-volt branch circuit  
12 (32-amp load) terminated at a junction box or receptacle outlet in close proximity to a parking  
13 space.

14 \* \* \*

15 Section 30. Section 23.84A.025 of the Seattle Municipal Code, last amended by  
16 Ordinance 127099, is amended as follows:

17 **23.84A.025 “M”**

18 \* \* \*

19 “Major retail store” means a structure or portion of a structure that provides adequate  
20 space of at least eighty thousand (80,000) square feet to accommodate the merchandising needs  
21 of a major new retailer with an established reputation, and providing a range of merchandise and  
22 services, including both personal and household items, to anchor downtown shopping activity

1 around the retail core, thereby supporting other retail uses and the area's vitality and regional  
2 draw for customers.

3 “Major transit stop” means:

- 4 1. Stops on a bus route operated by Sound Transit;
- 5 2. Commuter rail stops;
- 6 3. Stops on light rail, street car, or trolley bus systems;
- 7 4. Stops on bus rapid transit routes; and
- 8 5. Any future stop on a bus rapid transit route funded for development and  
9 projected for construction within an applicable six-year transit plan under RCW 35.58.2795.

10 \* \* \*

11 "Mid-block corridor" means an amenity feature that provides open space and publicly  
12 accessible connections across extremely long blocks to mitigate transportation impacts of new  
13 development by improving pedestrian circulation in high density areas, including but not  
14 limited to the South Lake Union Urban Center, the University Community Urban Center west  
15 of 15th Avenue NE, the Uptown Urban Center, the Northgate Urban Center, and the  
16 Downtown Urban Center east of Interstate 5.

17 “Middle housing” means any of the following residential uses, provided that they are  
18 located in structures that do not exceed a height limit of 32 feet not including roofs or rooftop  
19 features allowed in the underlying zone, as measured in Section 23.86.006:

- 20 1. Accessory dwelling unit
- 21 2. Adult family home
- 22 3. Apartment
- 23 4. Carriage house



1 \* \* \*

2 Section 32. Section 25.09.240 of the Seattle Municipal Code, last amended by Ordinance  
3 126509, is amended as follows:

4 **25.09.240 Short subdivisions and subdivisions**

5 \* \* \*

6 D. Development standards for new lots in neighborhood residential zones. If new lots are  
7 created in neighborhood residential zones by short subdivision or subdivision, the following  
8 development standards apply based on the area of each new lot that is outside the  
9 environmentally critical areas listed in subsection 25.09.240.A, plus environmentally critical  
10 areas in which development is allowed pursuant to subsections 25.09.240.B.1, 25.09.240.B.2,  
11 and 25.09.240.B.3:

12 1. Lot coverage and lot coverage exceptions according to subsections 23.44.010.C  
13 and 23.44.010.D.

14 2. Height limits according to Section 23.44.012(~~(, including the requirements of~~  
15 ~~subsection 23.44.012.A.3)) if the area of the largest rectangle or other quadrilateral that can be~~  
16 drawn within the lot lines of the new lot outside the environmentally critical areas is less than  
17 3,200 square feet.

18 \* \* \*

19 Section 33. The provisions of this ordinance are declared to be separate and severable.  
20 The invalidity of any clause, sentence, paragraph, subdivision, section, or portion of this  
21 ordinance, or the invalidity of its application to any person or circumstance, does not affect the  
22 validity of the remainder of this ordinance or the validity of its application to other persons or  
23 circumstances.

1 Section 34. This ordinance shall take effect as provided by Seattle Municipal Code  
2 Sections 1.04.020 and 1.04.070 or by June 30, 2025, whichever is later.

3 Passed by the City Council the \_\_\_\_\_ day of \_\_\_\_\_, 2025,  
4 and signed by me in open session in authentication of its passage this \_\_\_\_\_ day of  
5 \_\_\_\_\_, 2025.

6 \_\_\_\_\_  
7 President \_\_\_\_\_ of the City Council

Approved / returned unsigned / vetoed this \_\_\_\_\_ day of \_\_\_\_\_, 2025.

8 \_\_\_\_\_  
9 Bruce A. Harrell, Mayor

10 Filed by me this \_\_\_\_\_ day of \_\_\_\_\_, 2025.

11 \_\_\_\_\_  
12 Scheereen Dedman, City Clerk

13 (Seal)